

Description

Recessed Wall Luminaire.

ADA (American Disabilities Act) Compliant.

IP55. Class I. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Two cable entries. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

Weight	2.90 lb
Light distribution	diffused distribution
Light source	LED-6/6W / 350 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	6
Rated input power	7.5 W
Nominal Lumen (lm)	
LED Lumen	155
Total Lumen	930
Tj	85
Delivered lumens (lm)	
LED Lumen	18.8
Total Lumen	112.7
Та	25



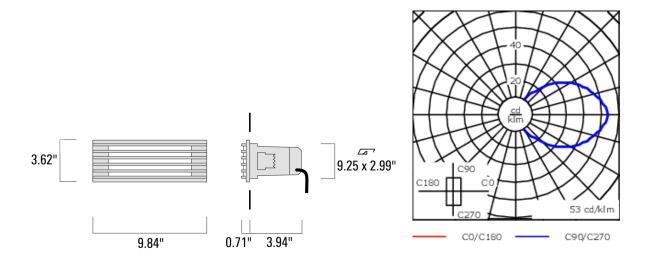

Specifications Material description

Body Luminaire body and lens frame constructed in die cast aluminum.

Lens Opal polycarbonate lens.

Colors RAL9004 Black

RAL9007 Grey Metallic

RAL9016 White

RAL8019 Dark Bronze

Gasket Silicone rubber gasket

Fasteners PCS polymer coated stainless steel

Ingress protection IP55
Impact resistance IK10
Corrosion resistance 5CE

Electrical description

Power supply Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.

133-0348



STX259 LED

Additional information

Lifetime	LED >60,000 h Ta 25°(B10/70)
	Control gear >50,000 h Ta 25°
Listings	ETL listed. Suitable for wet locations.