




Description

IP66, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Polycarbonate lens. Silicone rubber gasket.
Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Two cable entries.
Pre-installation blackout is recommended for mounting in concrete, available on request. Optional 2200 K version available. To be specified at time of ordering.

| | |
|--------------------|----------------------------|
| Weight | 1.20 kg |
| Light distribution | diffused distribution |
| Light source | LED-6/6W / 350 mA - 3000 K |
| CRI | 80 |
| Power supply | EC |
| LEDs | 6 |
| Rated input power | 7.5 W |
| Nominal Lumen (lm) | |
| LED Lumen | 155 |
| Total Lumen | 930 |
| Tj | 85 |
| Rated lumens (lm) | |
| LED Lumen | 6.2 |
| Total Lumen | 37.5 |
| Ta | 25 |

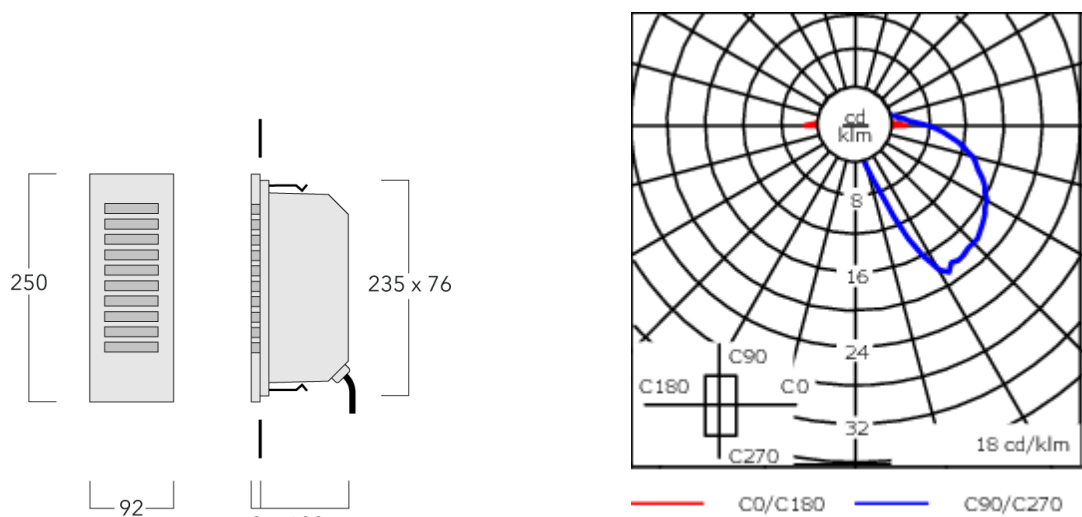

Specifications
Material description

| | |
|----------------------|--|
| Body | Marine-grade die-cast aluminium alloy |
| Lens | Polycarbonate lens |
| Colours | <div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9006 White aluminium</div> <div><div></div> RAL9007 Grey aluminium</div> |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware (unpainted) |
| Ingress protection | IP66 |
| Impact resistance | IK10 |
| Corrosion resistance | 5CE+Primer |

Electrical description

| | |
|------------------|----------------------------------|
| Power supply | 230V / 50 Hz |
| Driver / Ballast | Integral EC electronic converter |


Additional information

| | |
|----------|--|
| Lifetime | Ta=40° L80B10 > 54000h |
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. |

Mounting Accessories

Installation blackout

| Description | Part ID | A | B | C1 |
|--------------------------------|----------|-----|-----|-----|
| Installation blackout BST25-II | 133-0078 | 267 | 132 | 140 |

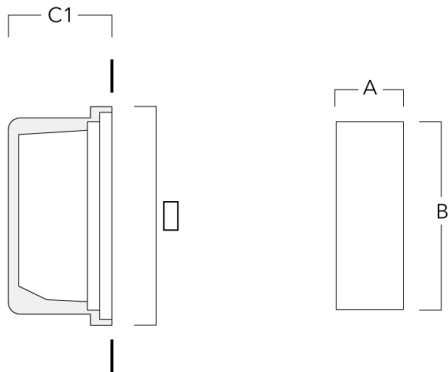

| | | | | |
|-------------------------------|----------|-----|-----|-----|
| Installation blackout BST25-I | 133-0076 | 267 | 132 | 130 |
|-------------------------------|----------|-----|-----|-----|

