

## SVL259 LED

**Description**

Vertically oriented, louvred steplight.

ADA (American Disabilities Act) Compliant.

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

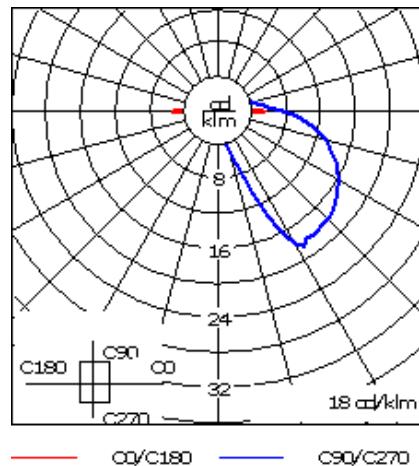
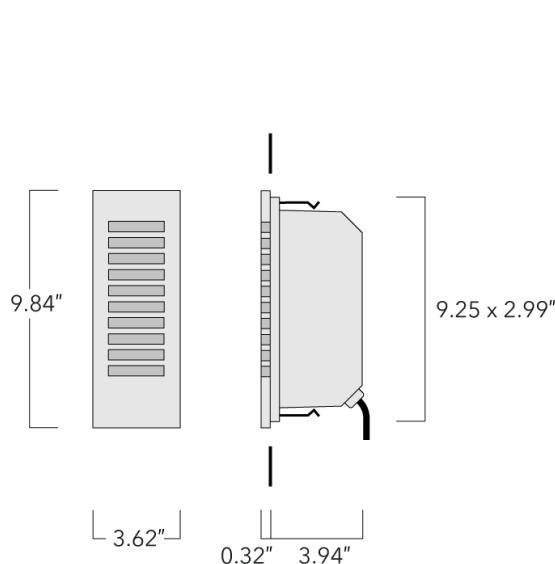
Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

Weight	2.60 lb
Light distribution	diffused distribution
Light source	LED-6/6W / 350 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	6
Rated input power	7.5 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	155
Total Lumen	930
T <sub>j</sub>	85
<b>Delivered lumens (lm)</b>	
LED Lumen	6.2
Total Lumen	37.5
T <sub>a</sub>	25

## SVL259 LED

**Specifications****Material description**

Body	Luminaire body and lens frame constructed in die cast aluminum
Lens	Opal polycarbonate lens.
Colors	<div style="display: inline-block; width: 20px; height: 10px; background-color: black; margin-right: 10px;"></div> RAL9004 Black <div style="display: inline-block; width: 20px; height: 10px; background-color: #808080; margin-right: 10px;"></div> RAL9007 Grey Metallic <div style="display: inline-block; width: 20px; height: 10px; background-color: #F0F0F0; margin-right: 10px;"></div> RAL9016 White <div style="display: inline-block; width: 20px; height: 10px; background-color: black; margin-right: 10px;"></div> RAL8019 Dark Bronze
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE

**Electrical description**

Power supply	120-277V / 50-60 Hz 0-10 V dimmable driver.
Driver / Ballast	Integral EC electronic converter

**Additional information**

---

Lifetime Ta=25°/40° L80B10 > 54000h

Listings ETL listed. Suitable for wet locations.

---

## Mounting Accessories

### Installation breakout

Description	Part ID	A	B	C1
Installation breakout BST25-I	133-0076	10.51"	5.19"	5.12"

