

133-0360

SVL259 LED

we-ef



Description

Vertically oriented, louvred steplight.

ADA (American Disabilities Act) Compliant.

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blackout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

| | |
|--------------------|----------------------------|
| Weight | 2.60 lb |
| Light distribution | diffused distribution |
| Light source | LED-6/6W / 350 mA - 3000 K |
| CRI | 80 |
| Power supply | electronic gear |
| LEDs | 6 |
| Rated input power | 7.5 W |

Nominal Lumen (lm)



| | |
|-------------|-----|
| LED Lumen | 155 |
| Total Lumen | 930 |
| Tj | 85 |

Delivered lumens (lm)

| | |
|-------------|------|
| LED Lumen | 6.2 |
| Total Lumen | 37.5 |
| Ta | 25 |

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030
customersupport.usa@we-ef.com - <https://we-ef.com/us>
Subject to technical changes and errors. - Generated on 07/24/2025

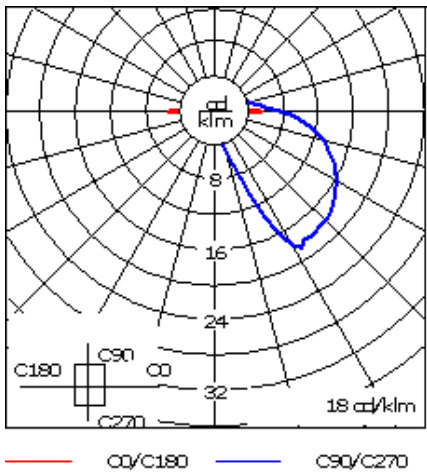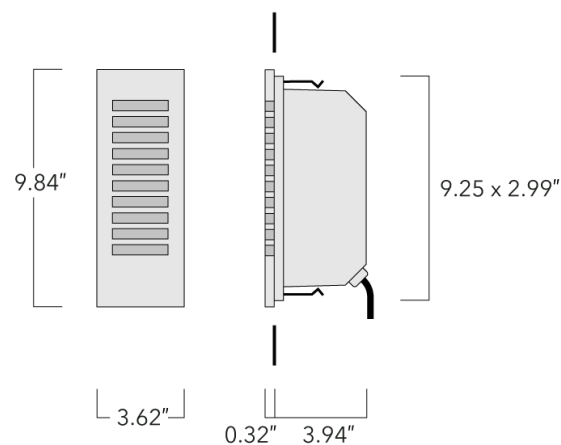

Specifications

Material description

| | |
|----------------------|---|
| Body | Luminaire body and lens frame constructed in die cast aluminum |
| Lens | Opal polycarbonate lens. |
| Colors | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS polymer coated stainless steel |
| Ingress protection | IP55 |
| Impact resistance | IK10 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|---|
| Power supply | 120-277V / 50-60 Hz 0-10 V dimmable driver. |
| Driver / Ballast | Integral EC electronic converter |

133-0360

SVL259 LED



Additional information

| | |
|----------|---|
| Lifetime | Ta=25°/40° L80B10 > 54000h |
| Listings | ETL listed. Suitable for wet locations. |

Mounting Accessories

Installation blackout

| Description | Part ID | A | B | C1 |
|-------------------------------|----------|--------|-------|-------|
| Installation blackout BST25-I | 133-0076 | 10.51" | 5.19" | 5.12" |

