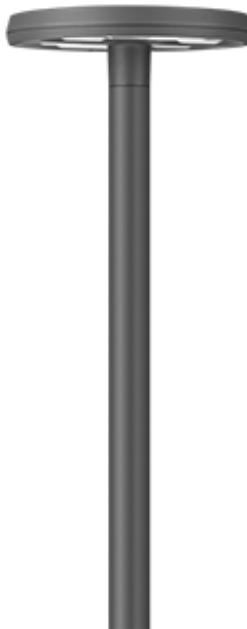


## RMT320 Two-sided/Two circuits

**Description**

IP66. IK09. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. RFC™ Reflection Free Contour main lens. Silicone CCG® Controlled Compression Gasket. Luminaires are factory-sealed and does not need to be opened during installation.

Integral electronic converter with DALI interface. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised OLC® One LED Concept optics for superior illumination and glare control.

Including 0.5 m cable with a cable connector.

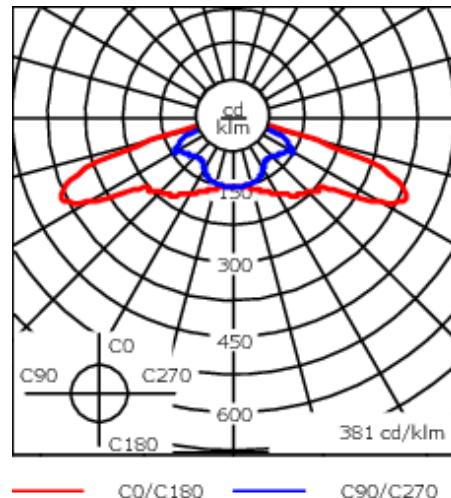
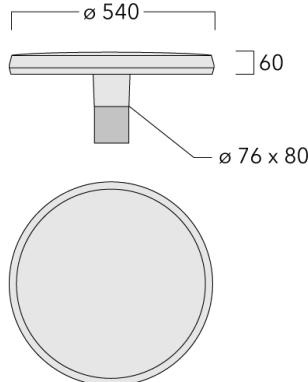
Maximum spacing for pathway and streetlighting applications depends on wattage and light distribution: 5.5 to 9 times the mounting height.

Two circuits allow separate switching.

Wild-Light options available on request.

Weight	8.00 kg
Light distribution	rectangular, side throw [R65]
Light source	LED-2x12/48W / 700mA - 3000K
CRI	80
Power supply	EC
BUG	B2 U0 G2
LEDs	24
Rated input power	54 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	290
Total Lumen	6960
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	238.1
Total Lumen	5714.7
T <sub>a</sub>	25

## RMT320 Two-sided/Two circuits

**Specifications****Material description**

Body	Marine-grade, die-cast aluminium alloy
Lens	RFC™ Reflection Free Contour main lens
Colours	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 10px; background-color: black; border: 1px solid black;"></span>  RAL9004 Signal black         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 10px; background-color: #a9a9a9; border: 1px solid black;"></span>  RAL9007 Grey aluminium         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 10px; background-color: #333; border: 1px solid black;"></span>  RAL7016 Anthracite grey         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 10px; background-color: #f0f0f0; border: 1px solid black;"></span>  RAL9016 Traffic white         </div> </div>
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK09
Corrosion resistance	5CE

**Electrical description**

Driver / Ballast	Integral electronic converter with DALI interface
------------------	---

**Additional information**

The two-sided light output	The two-sided light output versions are available with one or two circuits. Two circuits allow separate switching.
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare