



### Description

IP66. Class I. IK07. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens, hinged. Two cable entries. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire. Frame with safety catch.

Suitable for installation in non-insulated ceiling. A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

Weight	6.40 lb
Light distribution	symmetric, wide beam [W]
Light source	LED-12/24W / 700 mA - 4000 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	27 W

### Nominal Lumen (lm)

LED Lumen	310
Total Lumen	3720
Tj	85

### Delivered lumens (lm)


LED Lumen	241.3
Total Lumen	2896
Ta	25



**Mounting Accessories**

**Installation blackout**


Description	Part ID	A	B	C1	C
Installation blackout BD022-I	134-0797	15.08"	7.87"	8.23"	195

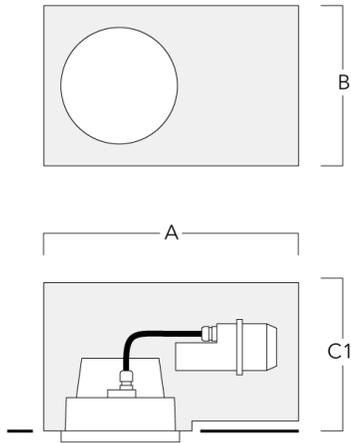

## Optical Accessories

### Softening Lens

Description	Part ID	C1
IO-360-DAC/DOC220-LED	134-1440	4.13



**DOC220 LED**


---

**Honeycomb louvre**

---

Description	Part ID	C1
IW-DOC22_LED	134-1444	4.13

---




---

**Wallwash lens**

---

Description	Part ID	C1
IO-20-WW-DAC/DOC220-LED	134-1491	4.13

---



**DOC220 LED**

---

**Linear spread lens**

Description	Part ID	C1
IO-180-DAC/DOC220-LED	134-1381	4.13

