



Description

IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lens, hinged. Frame with safety catch. Two cable entries. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board.

A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings. To be ordered separately.

Luminaire suitable for chlorine containing environments e.g. swimming pools, on request. Must be specified at time of ordering.


| | |
|--------------------|------------------------------|
| Weight | 4.00 kg |
| Light distribution | symmetric, medium beam [M] |
| Light source | LED-24/48W / 700 mA - 3000 K |
| CRI | 80 |
| Power supply | EC |
| LEDs | 24 |
| Rated input power | 54 W |

Nominal Lumen (lm)

| | |
|-------------|------|
| LED Lumen | 290 |
| Total Lumen | 6960 |
| Tj | 85 |

Rated lumens (lm)

| | |
|-------------|--------|
| LED Lumen | 252 |
| Total Lumen | 6047.2 |
| Ta | 25 |

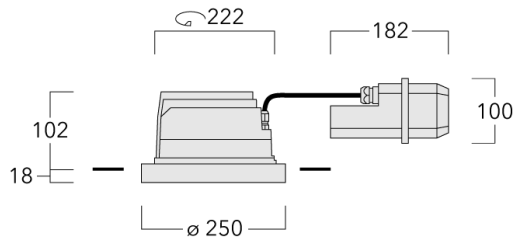

Specifications

Material description

| | |
|----------------------|---|
| Body | Marine-grade die-cast aluminium alloy |
| Lens | Safety glass lens, hinged |
| Colours | <div style="display: flex; flex-direction: column; gap: 5px;"> <div style="display: flex; align-items: center;"> RAL9004 Signal black</div> <div style="display: flex; align-items: center;"> RAL9006 White aluminium</div> <div style="display: flex; align-items: center;"> RAL9007 Grey aluminium</div> <div style="display: flex; align-items: center;"> RAL7016 Anthracite grey</div> <div style="display: flex; align-items: center;"> RAL9016 Traffic white</div> </div> |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP66 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|---|
| Power supply | 220-240V / 50-60 Hz |
| Driver / Ballast | Standard. Optional DALI version available. To be specified at time of ordering. |
| Surge protection | 6/6 kV |

Additional information

| | |
|-------------------------|------------------------|
| Lifetime | Ta=25° L90B10 > 90000h |
| Energy efficiency class | C-D (Light source) |


WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0
info@we-ef.com - <https://we-ef.com>


Subject to technical changes and errors. - Generated on 23/11/2024

Optical Accessories**Honeycomb louvre**

| Description | Part ID | C1 |
|-------------------|----------|-----|
| IW-DAC/DOC240-LED | 134-1445 | 191 |

**Wallwash lens**

| Description | Part ID | C1 |
|-------------------------|----------|-----|
| IO-20-WW-DAC/DOC240-LED | 134-1492 | 191 |



134-1398

DOC240 LED

we-ef

Linear spread lens

| Description | Part ID | C1 |
|-----------------------|----------|-----|
| IO-180-DAC/DOC240-LED | 134-1382 | 191 |



WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0
info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/11/2024

134-1398

DOC240 LED

we-ef

Control

DALI interface

| Description | Part ID | C |
|----------------|----------|----|
| DALI interface | 430-0013 | 90 |

WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0
info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/11/2024

Mounting Accessories

Installation blackout, flush - reduced depth

| Description | Part ID | A | B | C1 |
|-----------------------------------|----------|-----|-----|-----|
| Installation blackout BDO24-II-RE | 134-1714 | 574 | 305 | 227 |



Installation blackout, proud - reduced depth

| Description | Part ID | A | B | C1 |
|----------------------------------|----------|-----|-----|-----|
| Installation blackout BDO24-I-RE | 134-1717 | 574 | 305 | 209 |



Installation blackout, flush with shadow line - reduced depth

| Description | Part ID | A | B | C1 |
|------------------------------------|----------|-----|-----|-----|
| Installation blackout BDO24-III-RE | 134-1718 | 573 | 305 | 227 |

