



Description

IP66, Class I. Class II on request. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Safety glass lens, hinged. Frame with safety catch. Two cable entries. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board.

A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings. To be ordered separately.

Luminaire suitable for chlorine containing environments e.g. swimming pools, on request. Must be specified at time of ordering.



| | |
|--------------------|--|
| Weight | 4.00 kg |
| Light distribution | linear spread, very narrow beam, sharp cut-off [EES] |
| Light source | LED-24/48W / 700 mA - 3000 K |
| CRI | 80 |
| Power supply | EC |
| LEDs | 24 |
| Rated input power | 54 W |

Nominal Lumen (lm)

| | |
|-------------|------|
| LED Lumen | 290 |
| Total Lumen | 6960 |
| Tj | 85 |

Rated lumens (lm)

| | |
|-------------|--------|
| LED Lumen | 254.4 |
| Total Lumen | 6104.9 |
| Ta | 25 |

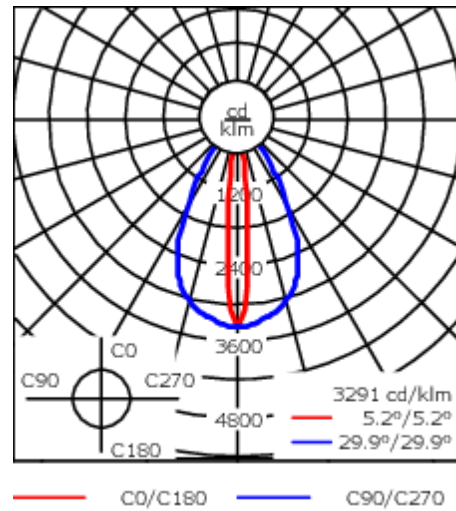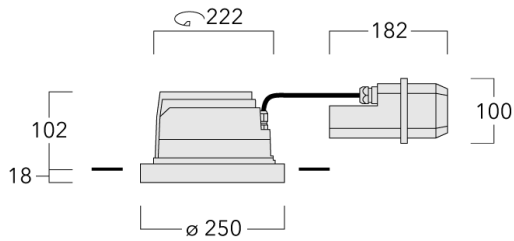

Specifications

Material description

| | |
|----------------------|--|
| Body | Marine-grade die-cast aluminium alloy |
| Lens | Safety glass lens, hinged |
| Colours | <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: black; margin-right: 5px;"></div> RAL9004 Signal black </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #cccccc; margin-right: 5px;"></div> RAL9006 White aluminium </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #808080; margin-right: 5px;"></div> RAL9007 Grey aluminium </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #333333; margin-right: 5px;"></div> RAL7016 Anthracite grey </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #e0e0e0; margin-right: 5px;"></div> RAL9016 Traffic white </div> |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP66 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|---|
| Power supply | 220-240V / 50-60 Hz |
| Driver / Ballast | Standard. Optional DALI version available. To be specified at time of ordering. |
| Surge protection | 6/6 kV |


Additional information

| | |
|-------------------------|------------------------|
| Lifetime | Ta=25° L90B10 > 90000h |
| Energy efficiency class | C-D (Light source) |

Optical Accessories


Honeycomb louvre

| Description | Part ID | C1 |
|-------------------|----------|-----|
| IW-DAC/DOC240-LED | 134-1445 | 191 |



Wallwash lens

| Description | Part ID | C1 |
|-------------------------|----------|-----|
| IO-20-WW-DAC/DOC240-LED | 134-1492 | 191 |



DOC240 LED

Linear spread lens

| Description | Part ID | C1 |
|-----------------------|----------|-----|
| IO-180-DAC/DOC240-LED | 134-1382 | 191 |



134-1402+134-1382

DOC240 LED

we-ef

Control


DALI interface

| Description | Part ID | C |
|----------------|----------|----|
| DALI interface | 430-0013 | 90 |

Mounting Accessories


Installation blackout, flush - reduced depth

| Description | Part ID | A | B | C1 |
|-----------------------------------|----------|-----|-----|-----|
| Installation blackout BDO24-II-RE | 134-1714 | 574 | 305 | 227 |

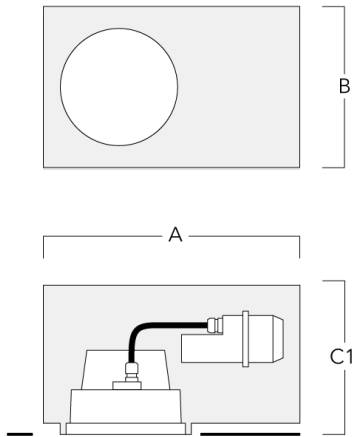

Installation blackout, proud - reduced depth

| Description | Part ID | A | B | C1 |
|----------------------------------|----------|-----|-----|-----|
| Installation blackout BDO24-I-RE | 134-1717 | 574 | 305 | 209 |

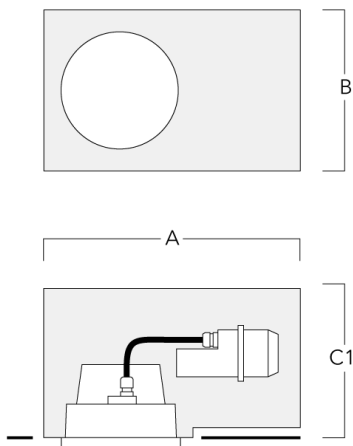

Installation blackout, flush with shadow line - reduced depth

| Description | Part ID | A | B | C1 |
|------------------------------------|----------|-----|-----|-----|
| Installation blackout BDO24-III-RE | 134-1718 | 573 | 305 | 227 |

