

DAC220 LED



**Description**

IP65, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gasket. Safety glass lens, hinged. Frame with safety catch. Two cable entries. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC_R_ One LED Concept. Factory installed LED circuit board.

2700 K option available on request.

Weight	2.90 kg
Light distribution	symmetric, medium beam [M]
Light source	LED-12/24W / 700 mA - 3000 K
CRI	80
Power supply	EC
LEDs	12
Rated input power	27 W
Nominal Lumen (lm)	
LED Lumen	290
Total Lumen	3480
T _j	85
Rated lumens (lm)	
LED Lumen	249.9
Total Lumen	2998.6
T _a	25

DAC220 LED

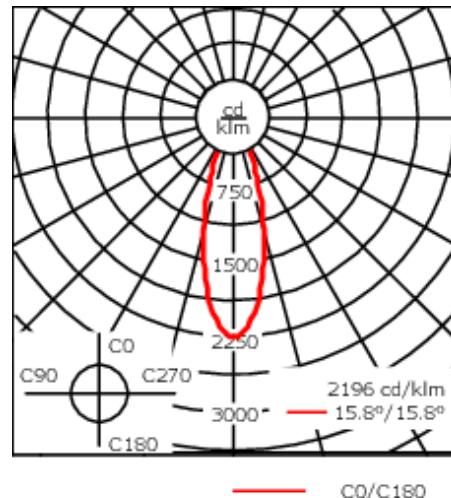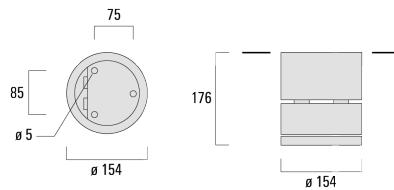

Specifications

Material description

Body Marine-grade die-cast aluminium alloy

Colours RAL9004 Signal black

█ RAL9006 White aluminium

█ RAL9007 Grey aluminium

█ RAL9016 Traffic white

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware (unpainted)

Ingress protection IP65

Impact resistance IK07

Corrosion resistance 5CE+Primer

Electrical description

Power supply 230V / 50 Hz

Driver / Ballast Integral EC electronic converter in thermally-separated compartment

Additional information


Lifetime $T_a=40^\circ L90B10 > 90000h$

Warranty The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

DAC220 LED

Optical Accessories**Linear spread lens**


Description	Part ID	C1
IO-180-DAC/DOC220-LED	134-1381	105



C1

Surface wash lens


Description	Part ID	C1
IO-360-DAC/DOC220-LED	134-1440	105



C1

DAC220 LED**Wallwash lens**

Description	Part ID	C1
IO-20-WW-DAC/DOC220-LED	134-1491	105



— C1 —

DAC220 LED

Control**DALI interface**

Description	Part ID	C
DALI interface	430-0013	90
