





Description

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens, hinged. Silicone rubber gasket.

Integral EC electronic converter in thermally-separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. Anodised aluminium reflector with PMMA diffuser. Two cable entries.

Pre-installation blackout is recommended for mounting in cast concrete ceilings, available on request.

Weight	2.30 kg
Light distribution	symmetric, wide beam [B]
Light source	LED-FT-24W / 700 mA - 3000 K
CRI	80
Power supply	EC
LEDs	1
Rated input power	27 W
Rated lumens (lm)	
LED Lumen	2433.8
Total Lumen	2433.8
Ta	25
Nominal Lumen (lm)	
LED Lumen	4220
Total Lumen	4220
Tc	25

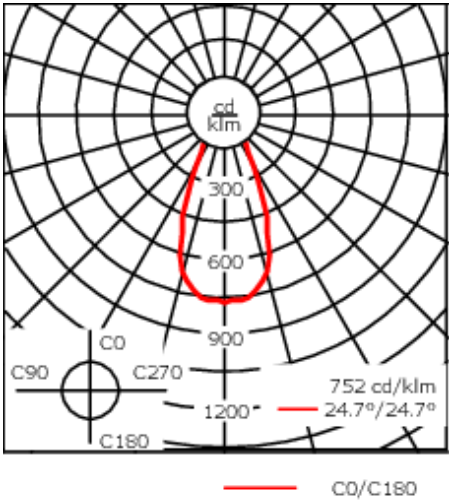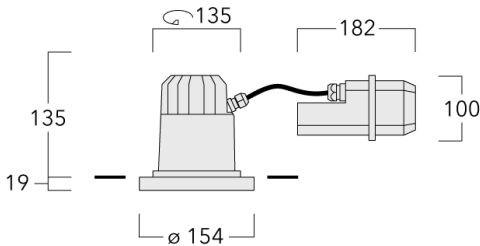

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens, hinged
Colours	RAL9004 Signal black RAL9007 Grey aluminium RAL7016 Anthracite grey RAL9016 Traffic white
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter in thermally-separated compartment


Additional information

Lifetime	Ta=25° L70B50 > 50000h
----------	------------------------

Mounting Accessories


Installation blackout, proud

Description	Part ID	A	B	C1	C
Installation blackout BD022-I	134-0797	383	200	209	195

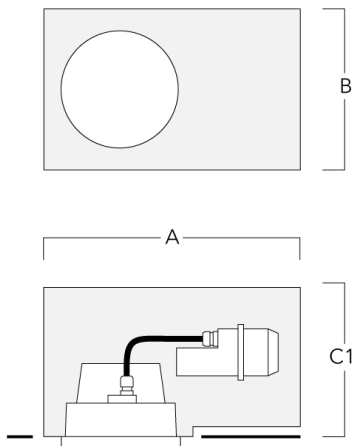

Installation blackout, flush

Description	Part ID	A	B	C1	C
Installation blackout BD022-II	134-1161	383	200	227	195

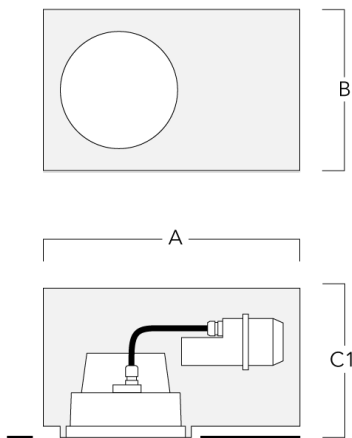

Control

DALI interface

Description	Part ID	C
DALI interface	430-0013	90