





### Description

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone rubber gasket. Safety glass lens, hinged. Frame with safety catch. Two cable entries. Anodised aluminium reflector, PMMA-Diffusor-Lens for glare control and soft wide beam distribution. Integral ECG control gear in thermally separated compartment.

A pre-installation blockout, proud or flush, is available and recommended for mounting in concrete ceilings. To be ordered separately.

2700 K option available on request.

Weight	2.30 kg
Light distribution	symmetric, wide beam [B]
Light source	LED-FT-24W / 700 mA - 4000 K
CRI	80
Power supply	EC
LEDs	1
Rated input power	27 W
<b>Rated lumens (lm)</b>	
LED Lumen	2537.7
Total Lumen	2537.7
T <sub>a</sub>	25
<b>Nominal Lumen (lm)</b>	
LED Lumen	4400
Total Lumen	4400
T <sub>c</sub>	25

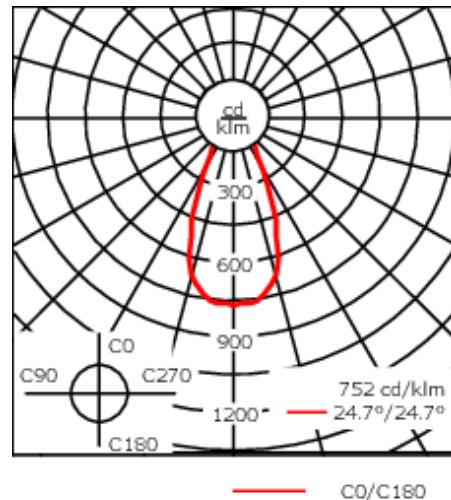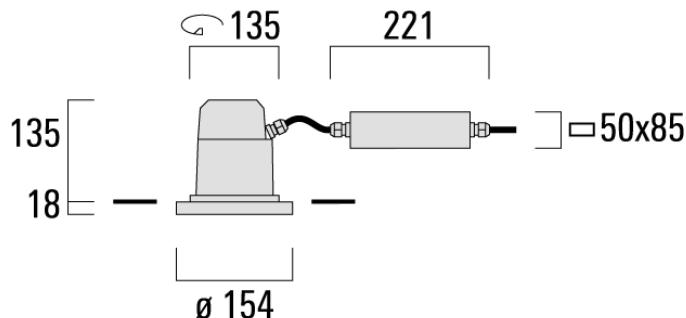

## Specifications

### Material description

Body	Marine-grade, die-cast aluminium alloy
Lens	Safety glass lens, hinged
Colours	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: black; border-radius: 50%;"></span> </div> <div>RAL9004 Signal black</div> </div> <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #e0e0e0; border-radius: 50%;"></span> </div> <div>RAL9006 White aluminium</div> </div> <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #808080; border-radius: 50%;"></span> </div> <div>RAL9007 Grey aluminium</div> </div> <div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #f0f0f0; border-radius: 50%;"></span> </div> <div>RAL9016 Traffic white</div> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE+Primer

**Electrical description**

---

Power supply	230V / 50 Hz
Driver / Ballast	Standard - optional DALI version available

---

**Additional information**

---


Lifetime	Ta=40° L70B50 > 50000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.

---

## Mounting Accessories


### Installation blockout, proud

Description	Part ID	A	B	C1	C
Installation blockout BDO22-I	134-0797	383	200	209	195

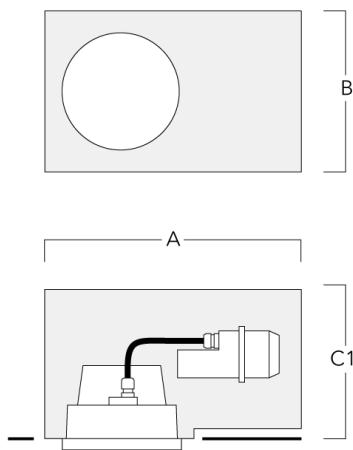

### Installation blockout, flush

Description	Part ID	A	B	C1	C
Installation blockout BDO22-II	134-1161	383	200	227	195

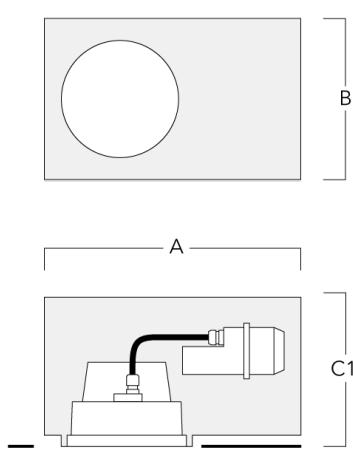

## Control

### DALI interface

Description	Part ID	C
DALI interface	430-0013	90