
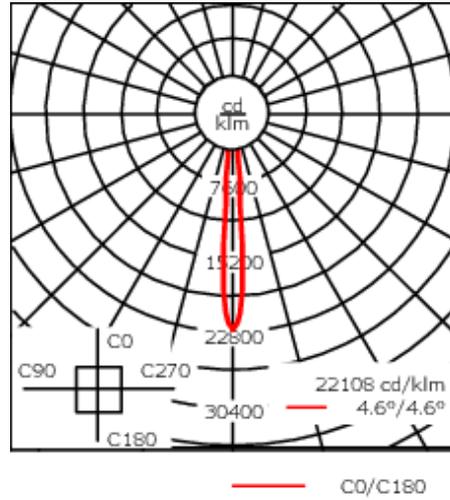


**Description**

IP66. Class I. IK06. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone CCG® Controlled Compression Gasket. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter in thermally separated compartment. Advanced thermal management protects LEDs while optimising lumens output. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

|                           |  |
|---------------------------|--|
| Weight                    | 2.40 kg  |
| Light distribution        | symmetric, very narrow beam, sharp cut-off [EES] |
| Light source              | LED-6/12W / 700 mA - 4000 K                      |
| CRI                       | 80   |
| Power supply              | EC   |
| LEDs                      | 6  |
| Rated input power         | 14.5 W   |
| <b>Nominal Lumen (lm)</b> |  |
| LED Lumen                 | 310  |
| Total Lumen               | 1860   |
| T <sub>j</sub>            | 85   |
| <b>Rated lumens (lm)</b>  |  |
| LED Lumen                 | 287  |
| Total Lumen               | 1721.8   |
| T <sub>a</sub>            | 25   |

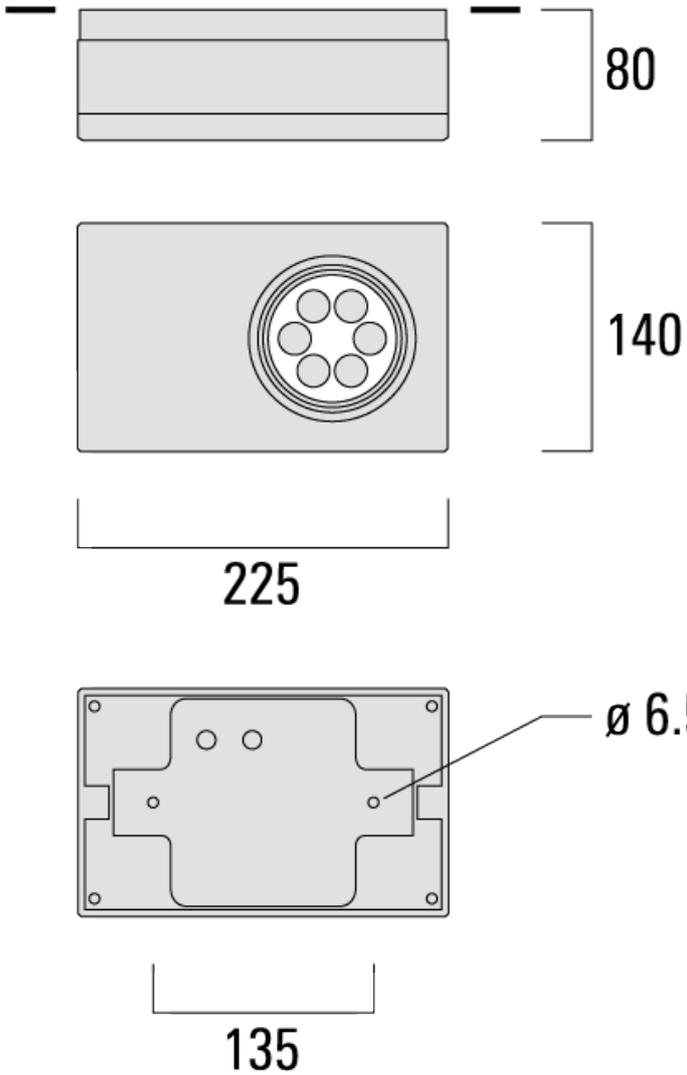

**Specifications****Material description**

---

|                      |  |
|----------------------|--|
| Body                 | Marine-grade, die-cast aluminium alloy   |
| Lens                 | Safety glass lens  |
| Colours              |  RAL9004 Signal black<br> RAL9007 Grey aluminium<br> RAL7016 Anthracite grey<br> RAL9016 Traffic white |
| Gasket               | Silicone CCG® Controlled Compression Gasket  |
| Fasteners            | PCS hardware   |
| Ingress protection   | IP66   |
| Impact resistance    | IK06   |
| Corrosion resistance | 5CE  |

---

**Electrical description**

---

|                  |   |
|------------------|---|
| Driver / Ballast | Integral EC electronic converter in thermally-separated compartment |
|------------------|---|

---

**Additional information**

## Control

### DALI interface

| Description    | Part ID  |
|----------------|----------|
| DALI interface | 430-0013 |

### 1-10 V analogue dimming interface

| Description                       | Part ID  |
|-----------------------------------|----------|
| 1-10 V analogue dimming interface | 430-0011 |