



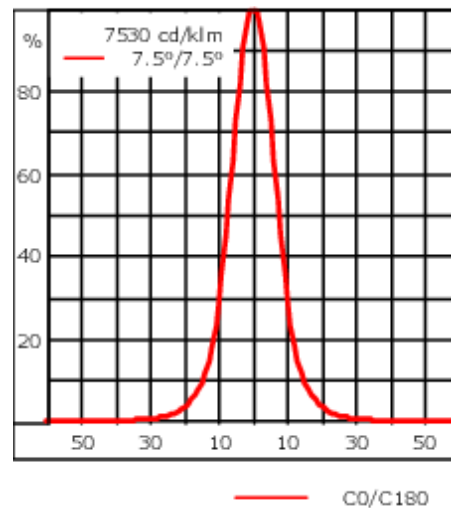

Description

IP66, Class I. IK07. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Integral EC electronic converter in thermally separated compartment. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. Factory installed LED circuit board. The luminaire is factory-sealed and does not need to be opened during the installation. Optional 2200 K version available, except version [A20]. To be specified at time of ordering.

| | |
|---------------------------|----------------------------------|
| Weight | 1.60 kg |
| Light distribution | symmetric, very narrow beam [EE] |
| Light source | LED-3/6W / 700 mA - 3000 K |
| CRI | 80 |
| Power supply | EC |
| LEDs | 3 |
| Rated input power | 7.5 W |
| Nominal Lumen (lm) | |
| LED Lumen | 290 |
| Total Lumen | 870 |
| T _j | 85 |
| Rated lumens (lm) | |
| LED Lumen | 216.9 |
| Total Lumen | 650.7 |
| T _a | 25 |

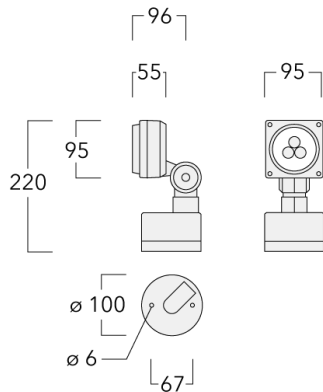

Specifications

Material description

| | |
|----------------------|---|
| Body | Marine-grade, die-cast aluminium alloy |
| Lens | Safety glass lens |
| Colours | <ul style="list-style-type: none"> RAL9004 Signal black RAL9006 White aluminium RAL9007 Grey aluminium RAL7016 Anthracite grey RAL9016 Traffic white |
| Gasket | Silicone CCG® Controlled Compression Gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware |
| Ingress protection | IP66 |
| Impact resistance | IK07 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|----------------------------------|
| Power supply | 220-240V / 50-60 Hz |
| Driver / Ballast | Integral EC electronic converter |
| Surge protection | 1/2 kV |

Additional information

| | |
|-------------------------|------------------------|
| Lifetime | Ta=25° L90B10 > 90000h |
| Energy efficiency class | C-D (Light source) |

WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0

info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/10/2024

145-9792


FLD111 LED

we-ef

Mounting Accessories

Ground spike EF

| Description | Part ID | H1 | Weight (kg) |
|----------------------------------|----------|-----|-------------|
| Ground spike EF1-2/M5 for FLD100 | 145-9196 | 270 | 1.00 |



WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0


info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/10/2024

Optical Accessories


Glare shield

| Description | Part ID | A | C1 |
|-----------------|----------|----|----|
| Glare shield ES | 145-9831 | 53 | 91 |



Snoot

| Description | Part ID | A | C1 |
|-------------|----------|----|----|
| Snoot ET | 145-9832 | 53 | 91 |



Linear spread lens

WE-EF LEUCHTEN GmbH


Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0

info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/10/2024


FLD111 LED

| Description | Part ID | C1 | H1 |
|----------------------------|----------|----|----|
| Linear spread lens IO-180* | 145-9835 | 69 | 69 |



Flood lens

| Description | Part ID | C1 | H1 |
|--------------------|----------|----|----|
| Flood lens IO-360* | 145-9836 | 69 | 69 |



145-9792

FLD111 LED

WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany

Phone: +49 5194 909-0

info@we-ef.com

<https://we-ef.com>

Subject to technical changes and errors.

Generated on 23/10/2024