



### Description

IP66, Class I. IK07. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket Safety glass lens. PMMA-LED lens array. Remote 240v gear to be ordered separately.

2700 K option available on request.



Weight	4.40 kg
Light distribution	symmetric, wide beam [B]
Light source	LED-24/48W / 700 mA - 3000 K
CRI	80
Power supply	EC
LEDs	24
Rated input power	54 W

### Nominal Lumen (lm)

LED Lumen	290
Total Lumen	6960
T <sub>j</sub>	85

### Rated lumens (lm)

LED Lumen	224.5
Total Lumen	5388.5
T <sub>a</sub>	25

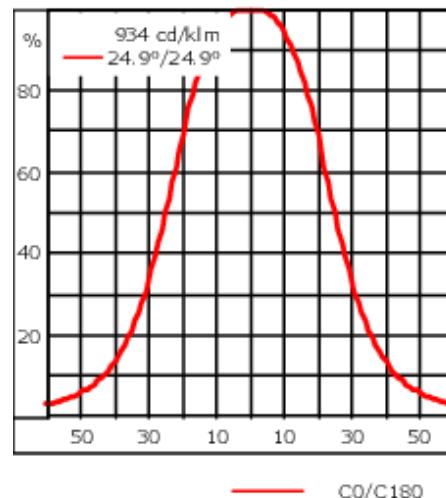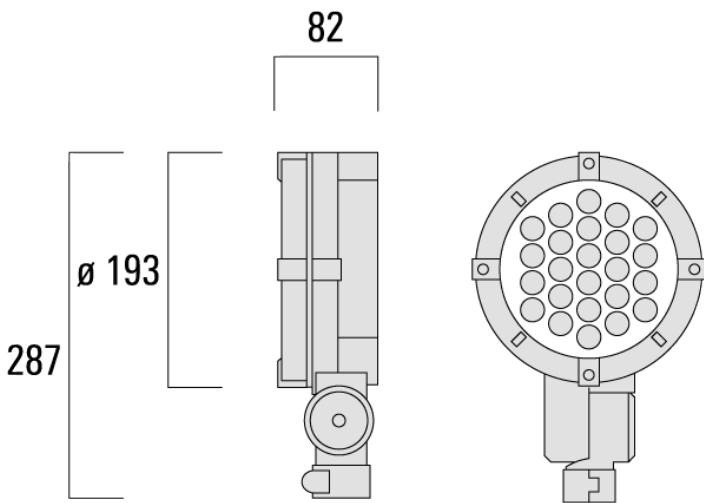

## Specifications

### Material description

Body	Marine-grade die-cast aluminium alloy
Lens	Safety glass lens
Colours	<div style="display: inline-block; width: 15px; height: 15px; background-color: black; margin-right: 10px;"></div> RAL9004 Signal black <div style="display: inline-block; width: 15px; height: 15px; background-color: #c0c0c0; margin-right: 10px;"></div> RAL9006 White aluminium <div style="display: inline-block; width: 15px; height: 15px; background-color: #808080; margin-right: 10px;"></div> RAL9007 Grey aluminium
Gasket	Silicone CCG® Controlled Compression Gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP66
Impact resistance	IK07
Corrosion resistance	5CE+Primer

### Electrical description

### **Additional information**

---


Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.
----------	--

---

## Optical Accessories

### Glare shield


Description	Part ID	A	C1
Glare shield ES	146-0229	120	145



---

### Snoot

Description	Part ID	A	C1
Snoot ET	146-0398	120	145



## Mounting Accessories

### Ground spike EF

Description	Part ID	H1	Weight (kg)
Ground spike EF1	310-9102	270	1.20

