




Description


IP66, Class I. IK07. Marine-grade die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Silicone CCG® Controlled Compression Gasket Safety glass lens. PMMA-LED lens array. Remote 240v gear to be ordered separately.

2700 K option available on request.

Weight	4.40 kg
Light distribution	symmetric, medium beam [M]
Light source	LED-24/48W / 700 mA - 4000 K
CRI	80
Power supply	EC
LEDs	24
Rated input power	54 W
Nominal Lumen (lm)	
LED Lumen	310
Total Lumen	7440
Tj	85
Rated lumens (lm)	
LED Lumen	269.3
Total Lumen	6464.2
Та	25



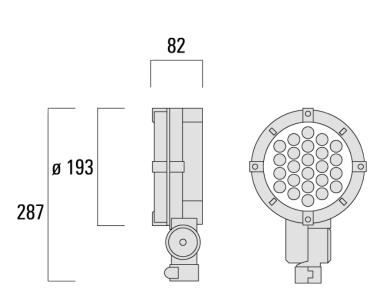



Specifications Material description

Body Marine-grade die-cast aluminium alloy

Lens Safety glass lens

Colours RAL9004 Signal black

RAL9006 White aluminium
RAL9007 Grey aluminium

Gasket Silicone CCG® Controlled Compression Gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware (unpainted)

Ingress protection IP66
Impact resistance IK07

Corrosion resistance 5CE+Primer

Electrical description

WE-EF LIGHTING Pty Ltd

146-0577





Additional information


Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement
	located on www.we-ef.com for further details.



Optical Accessories


Glare shield


Description	Part ID	Α	C1
Glare shield ES	146-0229	120	145



Snoot

D :::	D . ID . A	<u>C1</u>
Description	on Part ID A	C1
Snoot ET	146-0398 12	0 145







Mounting Accessories

Ground spike EF

Description	Part ID	H1	Weight (kg)
Ground spike EF1	310-9102	270	1.20

