


Description

IP55, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection including PCS hardware. Polycarbonate lens. Silicone rubber gasket.

Integral EC electronic converter. DALI interface. CAD-optimised lens for superior illumination and glare control.

Weight	7.70 kg
Light distribution	symmetric distribution [C60]
Light source	LED-FT-24W / 700 mA - 3000 K
CRI	80
Power supply	EC
BUG	B1 U3 G1
LEDs	1
Rated input power	27 W
Rated lumens (lm)	
LED Lumen	2561.2
Total Lumen	2561.2
Ta	25
Nominal Lumen (lm)	
LED Lumen	4220
Total Lumen	4220
Tc	25

ZA630-FT LED

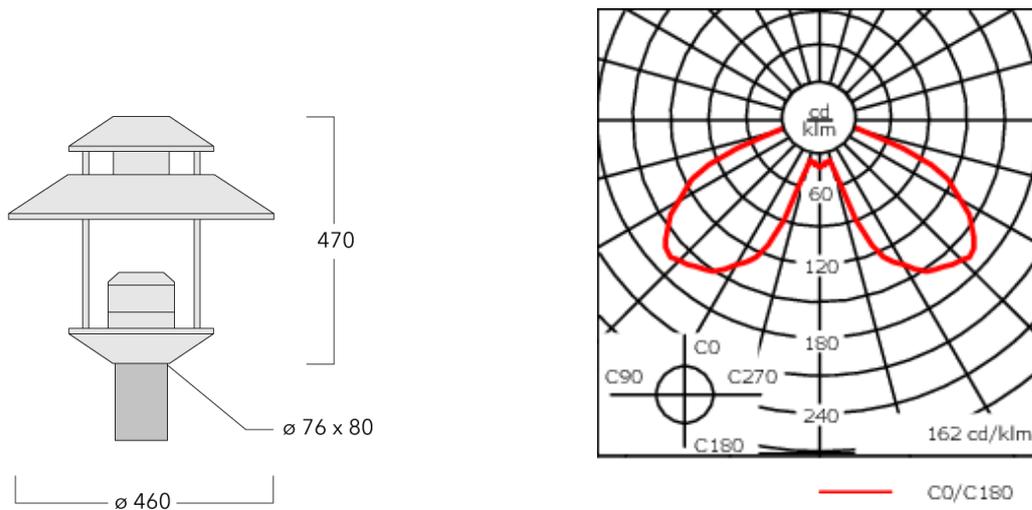

Specifications

Material description

Body	Marine-grade, die-cast aluminium alloy
Colours	<div style="display: flex; flex-direction: column; gap: 5px;"> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: black; margin-right: 5px;"></div> RAL9004 Signal black </div> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: grey; margin-right: 5px;"></div> RAL9007 Grey aluminium </div> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: darkgrey; margin-right: 5px;"></div> RAL7016 Anthracite grey </div> <div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: lightgrey; margin-right: 5px;"></div> RAL9016 Traffic white </div> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE
Windage	0.11 m ²

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral electronic converter with DALI interface
Power factor	> 0.9


Additional information

Lifetime	Ta=25° L70B50 > 50000h
BUG Rating	Please see individual Spec Sheets for classification of Backlight, Uplight and Glare


Mounting Accessories

Wall and pole brackets AZ

Description	Part ID	C1	D1	D2	D × L1	H1	H2	M1	Weight (kg)	C	H
Wall bracket AZ0-300, single	155-0269	300	275	235		350	275	12	3.60	300	270

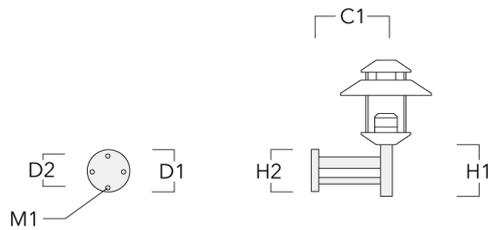


Pole bracket AZ20-300, double	155-0550	300			76 x 80	390			6.20	300	270
-------------------------------	----------	-----	--	--	---------	-----	--	--	------	-----	-----



ZA630-FT LED

Description	Part ID	C1	D1	D2	D × L1	H1	H2	M1	Weight (kg)	C	H
Pole bracket AZ30-300, triple	155-0551	300			76 x 80	390			8.60	300	270



Optical Accessories

Light shield

Description	Part ID	H1
Light shield LS180	159-0321	120

