




Description

IP67. IK09. Stainless steel inground section. Die-cast dome made from marine-grade aluminium alloy. Luminaire can be driven over at low speed. 5CE superior corrosion protection including PCS hardware. Optical lens made from PMMA. Silicone rubber gasket. Factory-sealed termination chamber with cable gland and 1.5 m of flexible PVC-free cable.

Integral EC electronic converter. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Luminaire installation blockout included in supply. Optional 2200 K version available. To be specified at time of ordering.

Weight	5.10 kg
Light distribution	controlled beam, one-sided
Light source	LED-6/6W / 350 mA - 4000 K
CRI	80
Power supply	electronic transformer
BUG	B0 U3 G2
LEDs	6
Rated input power	7.5 W
Nominal Lumen (lm)	
LED Lumen	170
Total Lumen	1020
T _j	85
Rated lumens (lm)	
LED Lumen	90.9
Total Lumen	545.1
T _a	25

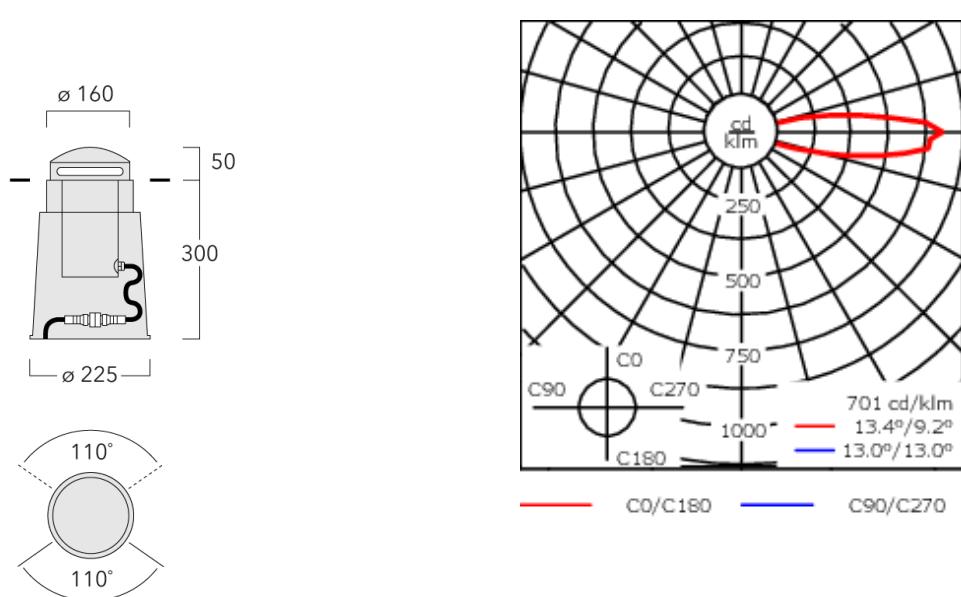

Specifications

Material description

Body	Stainless steel inground section. Die-cast dome made from marine-grade aluminium alloy.
Lens	PC
Colours	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> RAL9004 Signal black </div> <div style="text-align: center;"> RAL9007 Grey aluminium </div> <div style="text-align: center;"> RAL7016 Anthracite grey </div> <div style="text-align: center;"> RAL9016 Traffic white </div> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP67
Impact resistance	IK09
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Power factor	> 0.9

Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

Electrical Accessories

Sealable junction box

Description	Part ID	C1	M1	M2
Sealable junction box SJB130	185-1624	146	Ø 10	Ø 12 - 19

