

ETC330-GB LED



Description

IP69K. Class I. IK10+. Stainless steel construction. PCS hardware. Optional with Anti-Slip ceramic Coating ASC to DIN 51130 (Trip Classification 10) available on request. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max load 5.5 tons (11,000 lbs). Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. CAD-optimized optics for superior illumination and glare control. Integral driver in thermally separated compartment. OLC® One LED Concept. Factory-installed LED circuit board. Gimbal mounted, 360° rotatable and 30° tiltable. 'No tool' removable gear/lens tray.

The concrete-pour installation blackout is supplied as standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

|                    |                                |
|--------------------|--------------------------------|
| Weight             | 15.00 lb                       |
| Light distribution | linear spread, medium beam [M] |
| Light source       | LED-12/12W / 350 mA - 4000 K   |
| CRI                | 80                             |
| Power supply       | electronic gear                |
| LEDs               | 12                             |
| Rated input power  | 13.9 W                         |


| Nominal Lumen (lm) |      |
|--------------------|------|
| LED Lumen          | 170  |
| Total Lumen        | 2040 |
| Tj                 | 85   |

| Delivered lumens (lm) |        |
|-----------------------|--------|
| LED Lumen             | 139.5  |
| Total Lumen           | 1674.5 |
| Ta                    | 25     |

WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 08/14/2025

ETC330-GB LED

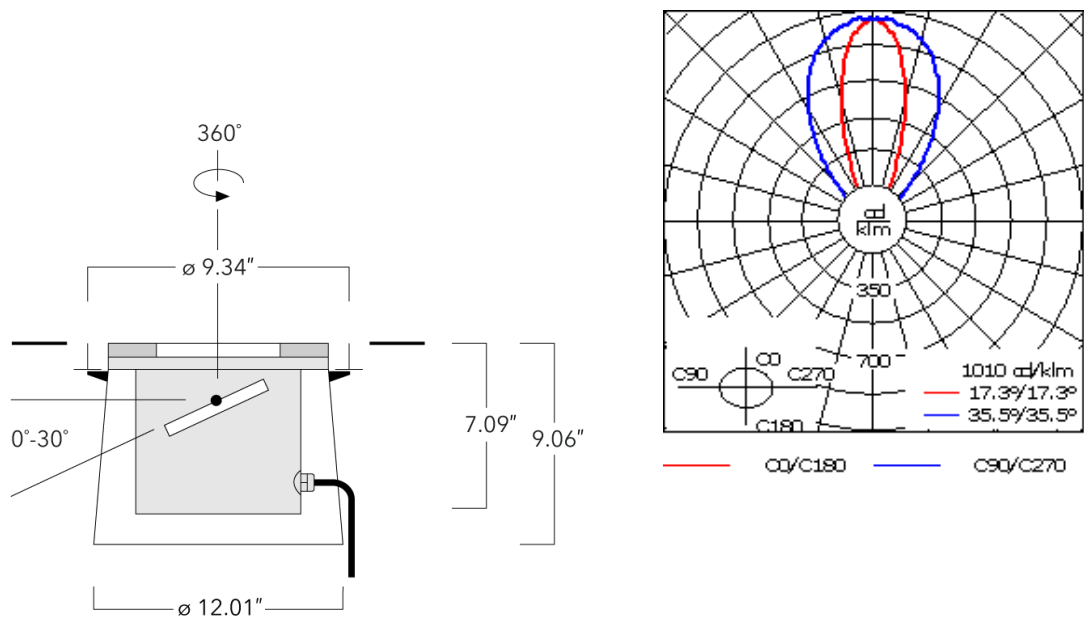

Specifications  
Material description

|                      |   |
|----------------------|---|
| Body                 | Luminaire body constructed of deep drawn stainless steel. Outer housing composite material. |
| Lens                 | 5/8" thick clear tempered glass lens. Max. load 5 tonnes.                                   |
| Colors               | <div></div> Stainless Steel   |
| Gasket               | Silicone rubber gasket  |
| Fasteners            | PCS polymer coated stainless steel  |
| Ingress protection   | IP69K - HIGHEST PROTECTION RATING AVAILABLE   |
| Impact resistance    | IK10+   |
| Corrosion resistance | 5CE   |

Electrical description

|                  |   |
|------------------|---|
| Power supply     | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter  |
| Termination      | Factory sealed termination chamber  |
| Power factor     | > 0.9   |

185-2577+185-2632



ETC330-GB LED

Additional information

|          |  |
|----------|--|
| Lifetime | Ta=25°/40° L90B10 > 90000h                                 |
| Dimming  | 0-10V available in request. Must be factory fitted.        |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |

Electrical Accessories

Sealable junction box

| Description                   | Part ID  | C1   | M1     | M2            |
|-------------------------------|----------|------|--------|---------------|
| Sealable junction box SJB 130 | 185-1624 | 5.75 | Ø 0.39 | Ø 0.47 - 0.75 |



Optical Accessories

Linear spread lens


| Description              | Part ID  | C1   |
|--------------------------|----------|------|
| IO-180 ETC130/330-GB LED | 185-2632 | 3.94 |



ETC330-GB LED


Softening Lens

| Description          | Part ID  | C1   |
|----------------------|----------|------|
| IO-360-ETC130-GB-LED | 185-2866 | 3.86 |



Honeycomb louvre

| Description          | Part ID  | C1   |
|----------------------|----------|------|
| IW-ETC130/330-GB-LED | 185-2870 | 3.86 |



ETC330-GB LED

ASC Lens

| Description     | Part ID  | C1   |
|-----------------|----------|------|
| ETC330 ASC Lens | 185-6901 | 6.26 |

