


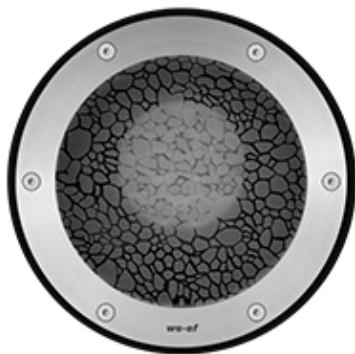

Description

Anti-Slip ceramic Coating. ASC Lens light loss factor = 14.25%.



IP69K. Class I. IK10+. Stainless steel construction. PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max load 5.5 tons (11,000 lbs). Luminaire can be driven over at low speed. Cable gland with spiral cable bending protection. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. Factory-installed circuit board with High Efficiency LEDs. 0-10V Dimming comes standard with luminaire. Gimbal mounted, 360° rotatable and 30° tiltable. 'No tool' removable gear/lens tray.

Suitable for flush installation in concrete or earth. The concrete-pour installation blockout is supplied as standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

Weight	18.20 lb
Light distribution	symmetric, very narrow beam [VN]
Light source	LED-12/18W / 500 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	21 W
Nominal Lumen (lm)	
LED Lumen	184.8
Total Lumen	2217
Tj	85
Delivered lumens (lm)	
LED Lumen	132.2
Total Lumen	1586.2
Ta	25

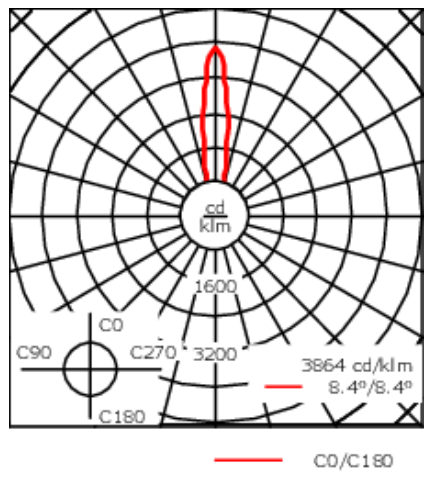

Specifications
Material description

Table with 2 columns: Specification (Body, Lens, Colors, Gasket, Fasteners, Ingress protection, Impact resistance, Corrosion resistance) and Description (Luminaire body constructed of deep drawn stainless steel. Outer housing composite material. 5/8 in thick Antislip Coating ASC tempered glass lens (Slip Resistance Class R10), max load 5 Tonnes. Stainless Steel. Silicone rubber gasket. PCS polymer coated stainless steel. IP69K - HIGHEST PROTECTION RATING AVAILABLE. IK10+. 5CE).

Electrical description

Table with 2 columns: Specification (Power supply, Driver / Ballast, Termination, Surge protection) and Description (Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. Factory sealed termination chamber. Integral 10kV Surge Protector).

Additional information

Table with 2 columns: Specification (Lifetime, Dimming, Listings) and Description (Ta=25°/40° L90B10 > 90000h. 0-10V available in request. Must be factory fitted. ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations).