


ETC130-GB LED ASC

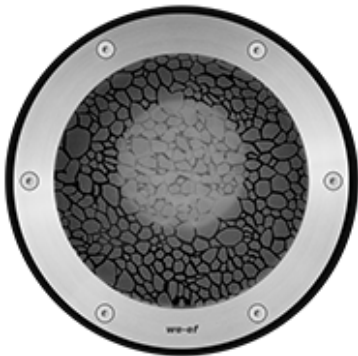

Description

Anti-Slip ceramic Coating. ASC Lens light loss factor = 14.25%.

IP69K. Class I. IK10+. Stainless steel construction. PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max load 5.5 tons (11,000 lbs). Luminaire can be driven over at low speed. Cable gland with spiral cable bending protection. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. Factory-installed circuit board with High Efficiency LEDs. 0-10V Dimming comes standard with luminaire. Gimbal mounted, 360° rotatable and 30° tiltable. 'No tool' removable gear/lens tray.

Suitable for flush installation in concrete or earth. The concrete-pour installation blockout is supplied as standard with luminaire.


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

| | |
|--------------------|--------------------------------------|
| Weight | 18.20 lb |
| Light distribution | linear spread, very narrow beam [VN] |
| Light source | LED-12/18W / 500 mA - 3000 K |
| CRI | 80 |
| Power supply | electronic gear |
| LEDs | 12 |
| Rated input power | 21 W |

| Nominal Lumen (lm) | |
|--------------------|-------|
| LED Lumen | 184.8 |
| Total Lumen | 2217 |
| Tj | 85 |

| Delivered lumens (lm) | |
|-----------------------|--------|
| LED Lumen | 116.1 |
| Total Lumen | 1393.2 |
| Ta | 25 |

ETC130-GB LED ASC

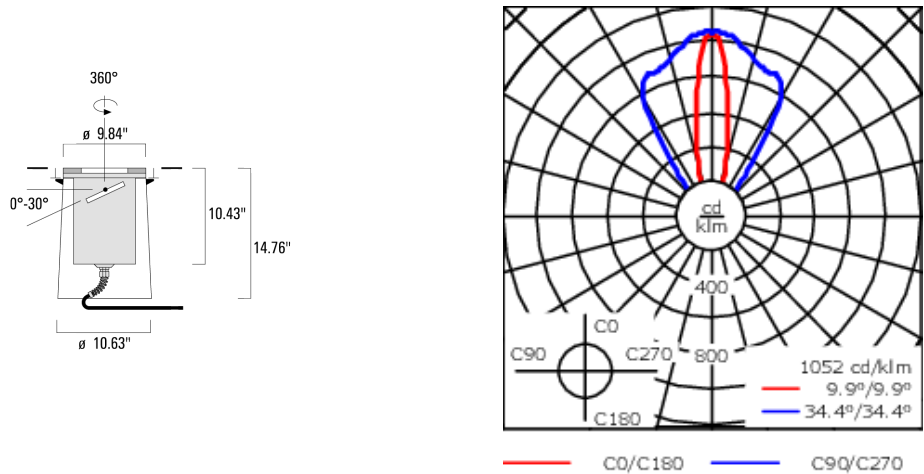

Specifications

Material description

| | |
|----------------------|--|
| Body | Luminaire body constructed of deep drawn stainless steel. Outer housing composite material. |
| Lens | 5/8 in thick Antislip Coating ASC tempered glass lens (Slip Resistance Class R10), max load 5 Tonnes |
| Colors | <div><div></div> Stainless Steel</div> |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS polymer coated stainless steel |
| Ingress protection | IP69K - HIGHEST PROTECTION RATING AVAILABLE |
| Impact resistance | IK10+ |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Termination | Factory sealed termination chamber |
| Surge protection | Integral 10kV Surge Protector |

Additional information

| | |
|----------|--|
| Lifetime | Ta=25°/40° L90B10 > 90000h |
| Dimming | 0-10V available in request. Must be factory fitted. |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |