

Description

Anti-Slip ceramic Coating.

IP69K. Class I. IK10+. Stainless steel construction. PCS hardware. Anti-Slip ceramic Coating ASC to DIN 51130 (Trip Classification 10). Silicone CCG® Controlled Compression Gasket. Safety glass lens; max load 5.5 tons (11,000 lbs). Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. Factory-installed circuit board with High Efficiency LEDs. Gimbal mounted, 360° rotatable and 30° tiltable. 'No tool' removable gear/lens tray.



The concrete-pour installation blackout is supplied as standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
Example: XXX-XXXX-9004 (Black).
+ XXX-XXXX (Accessory 1)

Weight	15.00 lb
Light distribution	symmetric, wide beam [W]
Light source	LED-12/12W / 350 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	14 W

Nominal Lumen (lm)	
LED Lumen	134.5
Total Lumen	1614
Tj	85

Delivered lumens (lm)	
LED Lumen	88.4
Total Lumen	1060.8
Ta	25

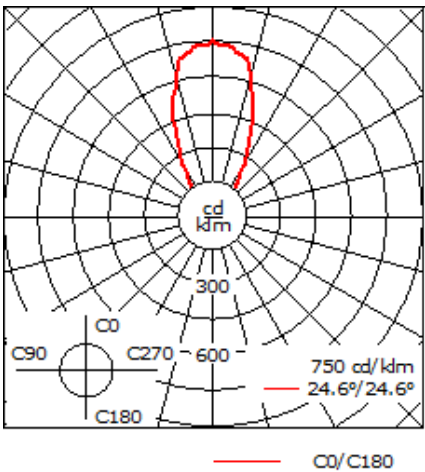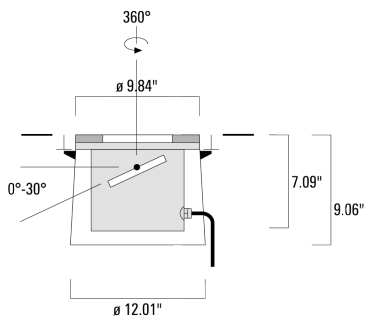

Specifications
Material description

Table with 2 columns: Component and Description. Rows include Body, Lens, Colors, Gasket, Fasteners, Ingress protection, Impact resistance, and Corrosion resistance.

Electrical description

Table with 2 columns: Component and Description. Rows include Power supply and Termination.

Additional information

Table with 2 columns: Component and Description. Rows include Ambient Temperature, Dimming, and Listings.