


ETC330-GB LED ASC

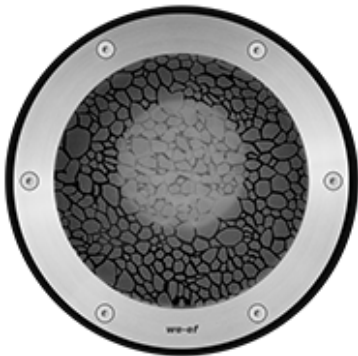

Description

Anti-Slip ceramic Coating.

IP69K. Class I. IK10+. Stainless steel construction. PCS hardware. Anti-Slip ceramic Coating ASC to DIN 51130 (Trip Classification 10). Silicone CCG® Controlled Compression Gasket. Safety glass lens; max load 5.5 tons (11,000 lbs). Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. Factory-installed circuit board with High Efficiency LEDs. Gimbal mounted, 360° rotatable and 30° tiltable. 'No tool' removable gear/lens tray.


The concrete-pour installation blackout is supplied as standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.
Example: XXX-XXXX-9004 (Black).
+ XXX-XXXX (Accessory 1)

Weight	15.00 lb
Light distribution	linear spread, very narrow beam [VN]
Light source	LED-12/12W / 350 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	12
Rated input power	14 W

Nominal Lumen (lm)	
LED Lumen	134.5
Total Lumen	1614
Tj	85

Delivered lumens (lm)	
LED Lumen	84.5
Total Lumen	1014.3
Ta	25

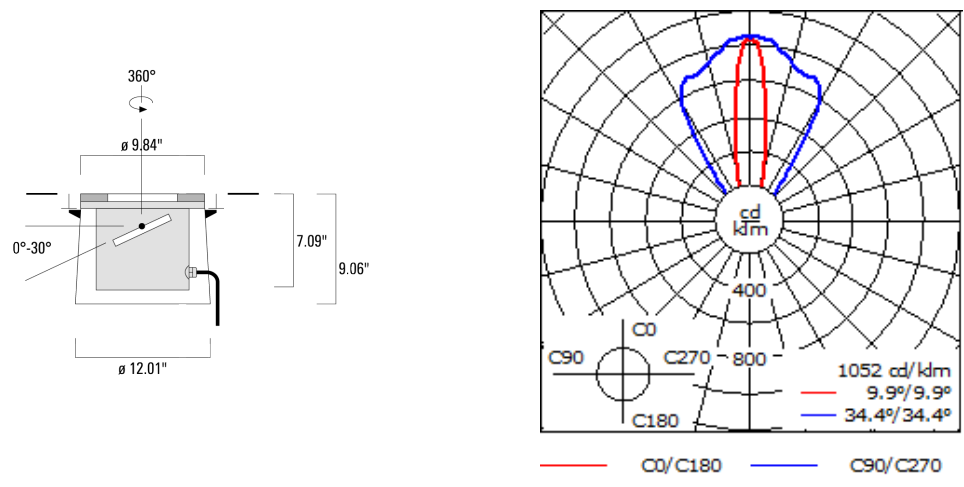

Specifications

Material description

Body	Luminaire body constructed of deep drawn stainless steel. Outer housing composite material.
Lens	5/8 in thick Antislip Coating ASC tempered glass lens (Slip Resistance Class R10), max load 5 tonnes
Colors	<div><div></div> Stainless Steel</div>
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP69K - HIGHEST PROTECTION RATING AVAILABLE
Impact resistance	IK10+
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Termination	Factory sealed termination chamber

Additional information

Ambient Temperature	Ta less than 25 deg. C
Dimming	0-10V available in request. Must be factory fitted.
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.