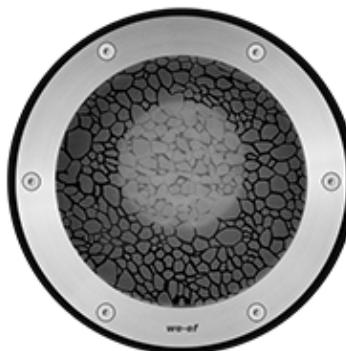


## ETC330-GB LED ASC

**Description**

Anti-Slip ceramic Coating.

IP69K. Class I. IK10+. Stainless steel construction. PCS hardware. Anti-Slip ceramic Coating ASC to DIN 51130 (Trip Classification 10). Silicone CCG® Controlled Compression Gasket. Safety glass lens; max load 5.5 tons (11,000 lbs). Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. Factory-installed circuit board with High Efficiency LEDs. Gimbal mounted, 360° rotatable and 30° tiltable. 'No tool' removable gear/lens tray.

The concrete-pour installation blockout is supplied as standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black).  
+ XXX-XXXX (Accessory 1)

|                    |  |
|--------------------|--|
| Weight             | 15.00 lb   |
| Light distribution | linear spread, very narrow beam, 'sharp cut-off' |
| Light source       | LED-12/12W / 350 mA - 4000 K                     |
| CRI                | 80   |
| Power supply       | electronic gear                                  |
| LEDs               | 12   |
| Rated input power  | 14 W   |

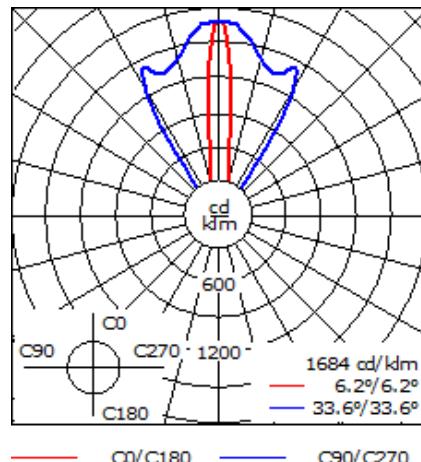
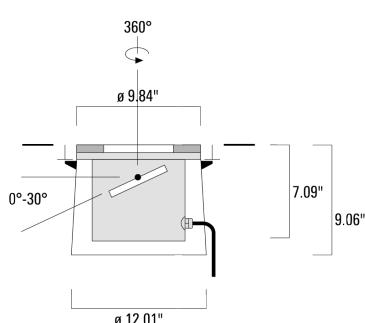
**Nominal Lumen (lm)**

|                |       |
|----------------|-------|
| LED Lumen      | 134.5 |
| Total Lumen    | 1614  |
| T <sub>j</sub> | 85    |

**Delivered lumens (lm)**

|                |        |
|----------------|--------|
| LED Lumen      | 91.1   |
| Total Lumen    | 1093.5 |
| T <sub>a</sub> | 25     |

## ETC330-GB LED ASC

**Specifications****Material description**

|                      |  |
|----------------------|--|
| Body                 | Luminaire body constructed of deep drawn stainless steel. Outer housing composite material.          |
| Lens                 | 5/8 in thick Antislip Coating ASC tempered glass lens (Slip Resistance Class R10), max load 5 tonnes |
| Colors               | Stainless Steel  |
| Gasket               | Silicone rubber gasket   |
| Fasteners            | PCS polymer coated stainless steel   |
| Ingress protection   | IP69K - HIGHEST PROTECTION RATING AVAILABLE  |
| Impact resistance    | IK10+  |
| Corrosion resistance | 5CE  |

**Electrical description**

|              |   |
|--------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Termination  | Factory sealed termination chamber  |

**Additional information**

|                     |  |
|---------------------|--|
| Ambient Temperature | T <sub>a</sub> less than 25 deg. C                         |
| Dimming             | 0-10V available in request. Must be factory fitted.        |
| Listings            | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |