



### Description

IP67, Class I. IK09. Stainless steel inground section. Die-cast dome made from marine-grade aluminium alloy. 5CE superior corrosion protection including PCS hardware. Silicone rubber gasket. Factory-sealed termination chamber complete with cable gland and 1.5 m of flexible PVC free cable. IP68 in-line connector facilitates easy removal for off-site lamp replacement. Integral EC electronic converter in thermally separated compartment. 'No tool' removable gear/lens tray. CAD-optimised optics for superior illumination and glare control. Factory installed LED circuit board. Luminaire requires installation blackout which is included in supply. Blackout is designed for installation in concrete. Optional 2200 K version available. To be specified at time of ordering.

Luminaire can be driven over at low speeds only. It is not designed for normal traffic conditions. Luminaire can be damaged under such conditions as breaking, accelerating or turning.

Weight	5.10 kg
Light distribution	controlled beam, two-sided
Light source	LED-2x6/12W / 350 mA - 4000K
CRI	80
Power supply	electronic transformer
BUG	B0 U3 G2
LEDs	12
Rated input power	14 W

### Nominal Lumen (lm)

LED Lumen	170
Total Lumen	2040
Tj	85



### Rated lumens (lm)

LED Lumen	90.7
Total Lumen	1088.4
Ta	25

185-2768

EFC120 LED

**we-ef**

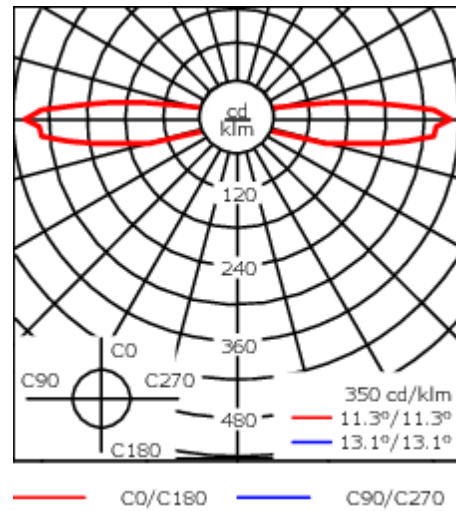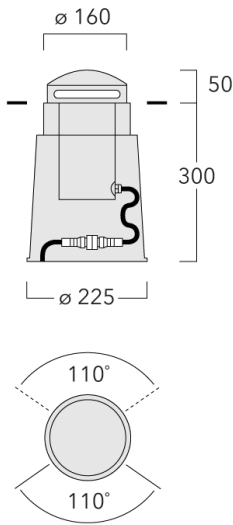

## Specifications

### Material description

Body	Stainless steel inground section. Die-cast dome made from marine-grade aluminium alloy
Lens	PC
Colours	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 15px; height: 15px; background-color: black; margin-right: 5px;"></span> RAL9004 Signal black</li> <li><span style="display: inline-block; width: 15px; height: 15px; background-color: #cccccc; margin-right: 5px;"></span> RAL9006 White aluminium</li> <li><span style="display: inline-block; width: 15px; height: 15px; background-color: #808080; margin-right: 5px;"></span> RAL9007 Grey aluminium</li> <li><span style="display: inline-block; width: 15px; height: 15px; background-color: #333333; margin-right: 5px;"></span> RAL7016 Anthracite grey</li> <li><span style="display: inline-block; width: 15px; height: 15px; background-color: #e0e0e0; margin-right: 5px;"></span> RAL9016 Traffic white</li> </ul>
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware
Ingress protection	IP67
Impact resistance	IK09
Corrosion resistance	5CE

### Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Power factor	> 0.9
Surge protection	1/2 kV

#### WE-EF LEUCHTEN GmbH

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0

info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/11/2024

**185-2768**

**EFC120 LED**

**we-ef**

**Additional information**

---

Lifetime Ta=25° L90B10 > 90000h

Energy efficiency class C-D (Light source)

---

**WE-EF LEUCHTEN GmbH**

Töpinger Straße 16, 29646 Bispingen, Germany - Phone: +49 5194 909-0  
info@we-ef.com - <https://we-ef.com>

Subject to technical changes and errors. - Generated on 23/11/2024