




Description

IP67. IK09. Stainless steel inground section. Die-cast dome made from marine-grade aluminium alloy. Luminaire can be driven over at low speed. 5CE superior corrosion protection including PCS hardware. Optical lens made from PMMA. Silicone rubber gasket. Factory-sealed termination chamber with cable gland and 1.5 m of flexible PVC-free cable.

Integral EC electronic converter. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Luminaire installation blackout included in supply. Optional 2200 K version available. To be specified at time of ordering.

Weight	5.10 kg
Light distribution	controlled beam, two-sided
Light source	LED-2x6/12W / 350 mA - 4000K
CRI	80
Power supply	electronic transformer
BUG	B0 U3 G2
LEDs	12
Rated input power	14 W
Nominal Lumen (lm)	
LED Lumen	170
Total Lumen	2040
Tj	85
Rated lumens (lm)	
LED Lumen	90.7
Total Lumen	1088.4
Ta	25

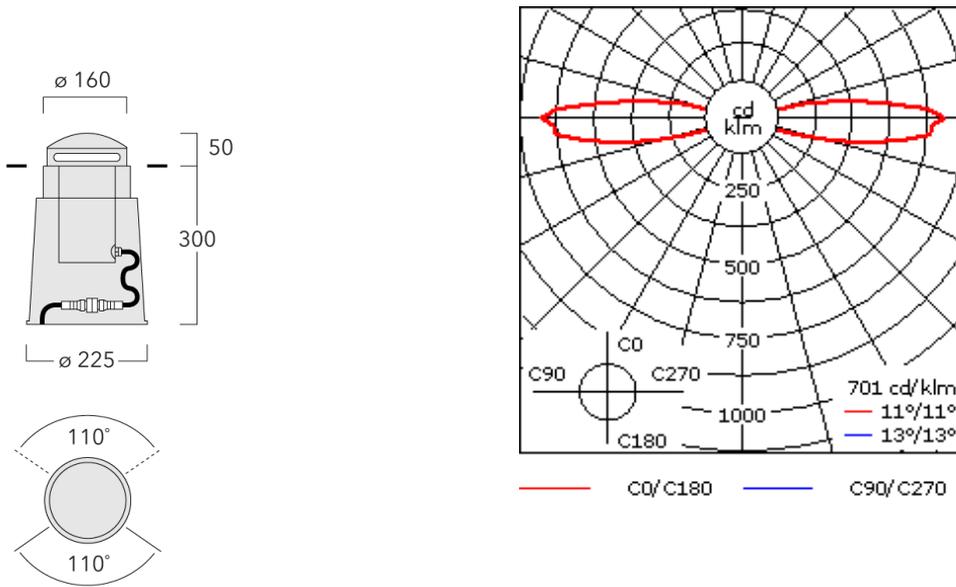

Specifications

Material description

Body	Stainless steel inground section. Die-cast dome made from marine-grade aluminium alloy.
Lens	PC
Colours	<div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: black; margin-right: 5px;"></div> <div>RAL9004 Signal black</div> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #808080; margin-right: 5px;"></div> <div>RAL9007 Grey aluminium</div> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #404040; margin-right: 5px;"></div> <div>RAL7016 Anthracite grey</div> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: #e0e0e0; margin-right: 5px;"></div> <div>RAL9016 Traffic white</div> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP67
Impact resistance	IK09
Corrosion resistance	5CE

Electrical description

Power supply	220-240V / 50-60 Hz
Driver / Ballast	Integral EC electronic converter
Power factor	> 0.9

Additional information

Lifetime	Ta=25° L90B10 > 90000h
----------	------------------------

Electrical Accessories

Sealable junction box

Description	Part ID	C1	M1	M2
Sealable junction box SJB130	185-1624	146	Ø 10	Ø 12 - 19

