




### Description

IP69. IK10+. Stainless steel construction including PCS hardware. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Luminaire installation blockout and sealable junction box included in supply.

Weight	6.40 kg
Light distribution	symmetric, very narrow beam [EE]
Light source	LED-12/24W / 700 mA - 4000 K
CRI	80
Power supply	EC
LEDs	12
Rated input power	27 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	310
Total Lumen	3720
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	253.9
Total Lumen	3047.3
T <sub>a</sub>	25

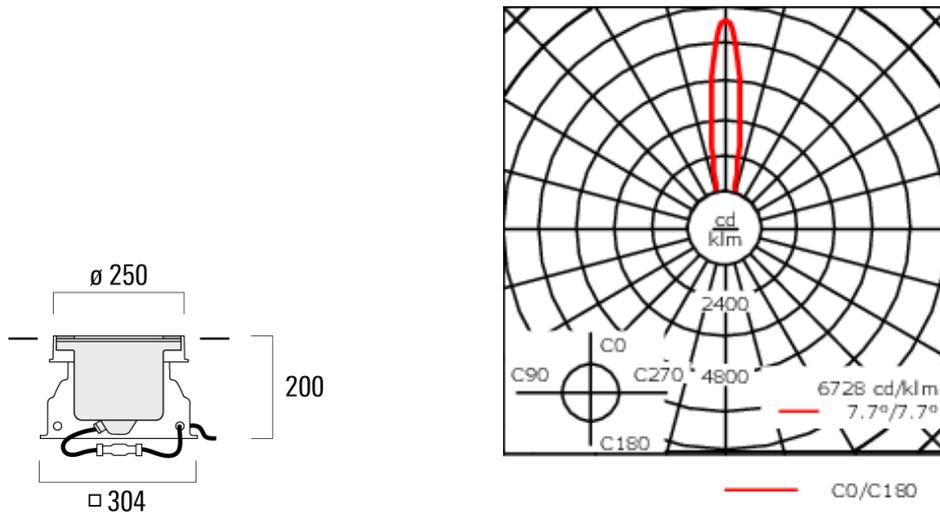

## Specifications

### Material description

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP69
Impact resistance	IK10+

### Electrical description

Driver / Ballast	Integral EC electronic converter
------------------	----------------------------------

### Additional information

**Control**

**DALI interface**

---

Description	Part ID
DALI interface	430-0013

---

**1-10 V analogue dimming interface**

---

Description	Part ID
1-10 V analogue dimming interface	430-0011

---

## Mounting Accessories

### Installation cover


Description	Part ID	C1
Installation cover BE	185-0325	250



**Optical Accessories**


**Linear spread lens**

Description	Part ID	C1
Linear spread lens IO-180	185-7170	191



**Flood lens**

Description	Part ID	C1
Flood lens IO-360	185-7171	191




**ETC330-FS LED**

---

**Colour filter**

Description	Part ID
Colour filter IF	on request



---


**Linear louvre**

Description	Part ID	C1
Linear louvre IL	185-7172	191




**Honeycomb louvre**

Description	Part ID	C1
Honeycomb Louvre IW	185-7180	191



**Wallwash lens**

Description	Part ID	C1
Wallwash lens IO-20	134-1492	191



**Colour correction filter**

---

Description	Part ID
IF-3000K > 2400K	185-7179

---

