



Weight

#### **Description**

IP69. IK10+. Stainless steel construction including PCS hardware. Safety glass lens with opal diffuser, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Complete with cable gland and 1.5 m of flexible PVC-free cable.


Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading.


Luminaire installation blockout and sealable junction box included in supply.


| Light distribution | symmetric, diffused distribution |  |
|--------------------|----------------------------------|--|
| Light source       | LED-3/6W / 700 mA - 3000 K       |  |
| CRI                | 80                               |  |
| Power supply       | EC                               |  |
| LEDs               | 3                                |  |
| Rated input power  | 7.5 W                            |  |
| Nominal Lumen (lm) |                                  |  |
| LED Lumen          | 290                              |  |
| Total Lumen        | 870                              |  |
| Tj                 | 85                               |  |
| Rated lumens (lm)  |                                  |  |
| LED Lumen          | 65.7                             |  |
| Total Lumen        | 197                              |  |
| Та                 | 25                               |  |

3.70 kg



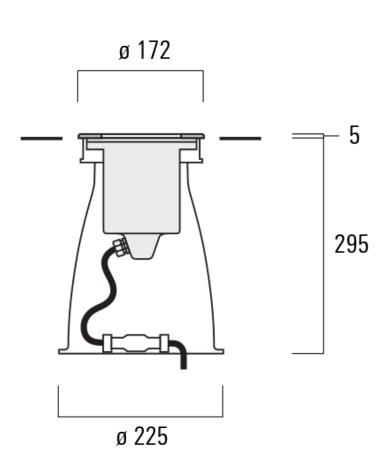

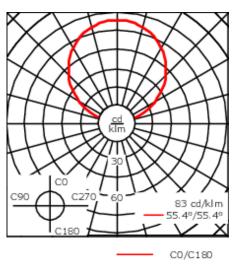





## **Specifications Material description**

Body Stainless steel construction

Lens Safety glass lens with opal diffuser, max. load 5 tonnes

Colours Stainless Steel

Gasket Silicone rubber gasket

PCS hardware **Fasteners** 

Ingress protection IP69 Impact resistance IK10+

### **Electrical description**

Driver / Ballast Integral EC electronic converter

#### **Additional information**





### **Control**

### **DALI** interface

| Description    | Part ID  |
|----------------|----------|
| DALI interface | 430-0013 |

### 1-10 V analogue dimming interface

| Description                       | Part ID  |
|-----------------------------------|----------|
| 1-10 V analogue dimming interface | 430-0011 |





# **Mounting Accessories**

### **Installation cover**

| Description           | Part ID  | C1  |
|-----------------------|----------|-----|
| Installation cover BE | 185-0796 | 160 |



WE-EF LIGHTING (Thailand) Co., Ltd.