





### Description

IP69. IK10+. Stainless steel construction including PCS hardware. Safety glass lens with opal diffuser, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Complete with cable gland and 0.5 m of flexible PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading.

Luminaire installation blackout and sealable junction box included in supply.

Weight	3.80 kg
Light distribution	symmetric, diffused distribution
Light source	LED-3/6W / 700 mA - 3000 K
CRI	80
Power supply	EC
LEDs	3
Rated input power	7.5 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	290
Total Lumen	870
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	65.7
Total Lumen	197
T <sub>a</sub>	25

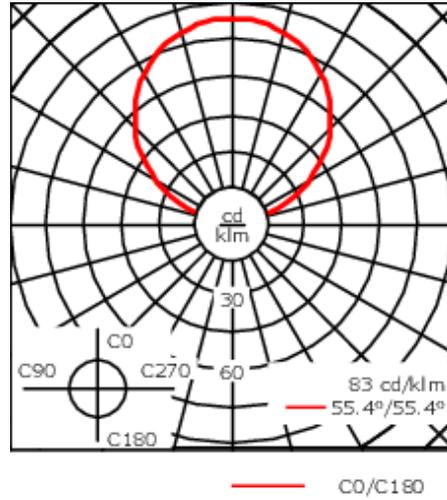

## Specifications

### Material description

Body	Stainless steel construction
Lens	Safety glass lens with opal diffuser, max. load 5 tonnes
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP69
Impact resistance	IK10+

### Electrical description

Driver / Ballast	Integral EC electronic converter
------------------	----------------------------------

### Additional information

**Control**

**DALI interface**

---

Description	Part ID
DALI interface	430-0013

---

**1-10 V analogue dimming interface**

---

Description	Part ID
1-10 V analogue dimming interface	430-0011

---

## Mounting Accessories

### Installation cover

Description	Part ID	C1
Installation cover BE	185-0796	160

