



### Description

IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Silicone rubber gasket. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 0,5 m of flexible PVC free cable. Cable gland with spiral cable bending protection.

Integral EC electronic converter.

Luminaire requires installation blockout and sealable junction box, which are included in supply.

2700 K option available on request.

**IMPORTANT!** Inground blockouts must be installed with effective drainage, watch [here](https://vimeo.com/672613058).


Weight	6.30 kg
Light distribution	symmetric, diffused distribution
Light source	LED-6/12W / 700 mA - 3000 K
CRI	80
Power supply	EC
LEDs	6
Rated input power	14.5 W

### Nominal Lumen (lm)

LED Lumen	290
Total Lumen	1740
Tj	85

### Rated lumens (lm)

LED Lumen	61.5
Total Lumen	369.2
Ta	25

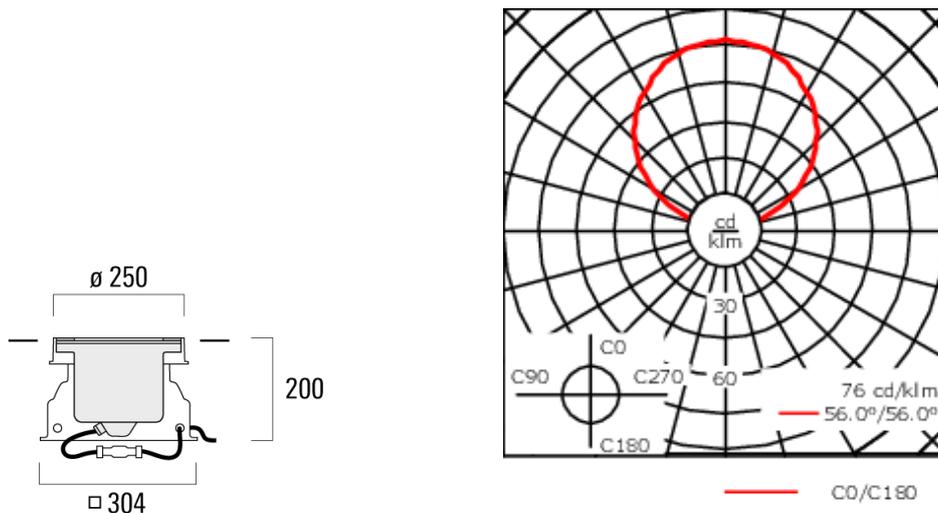

## Specifications

### Material description

Body	Stainless steel construction
Lens	Safety glass lens with opal diffuser, max. load 5 tonnes
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP67
Impact resistance	IK10+

### Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter

### Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. Warranty void if installed without proper drainage.
----------	--

## Mounting Accessories

### Installation cover

Description	Part ID	C1
Installation cover BE	185-0325	250

