



### Description


IP67. IK07. Stainless steel inground section. Die-cast hood made from marine-grade aluminium alloy. Construction helps to prevent accumulation of insects, leaves and debris on lens and restricts glare to passers-by. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone rubber gasket. Factory-sealed termination chamber with cable gland and 0.5 m of flexible PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Luminaire installation blockout and sealable junction box included in supply.

Weight	14.80 kg
Light distribution	symmetric, medium beam [M]
Light source	LED-12/24W / 700 mA - 3000 K
CRI	80
Power supply	EC
LEDs	12
Rated input power	27 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	290
Total Lumen	3480
Tj	85
<b>Rated lumens (lm)</b>	
LED Lumen	197.3
Total Lumen	2367.3
Ta	25

## ESC330-FS LED

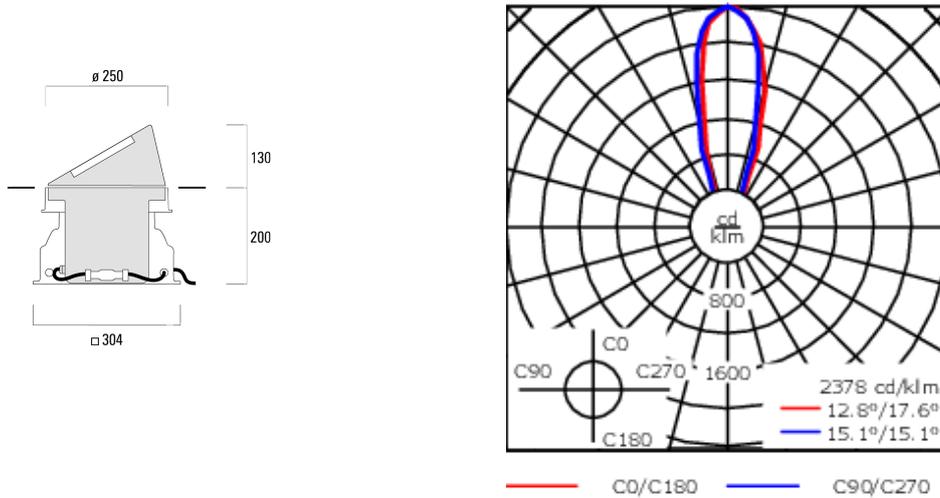

## Specifications

## Material description

Body	Stainless steel inground section. Die-cast hood made from marine-grade aluminium alloy
Lens	Safety glass lens
Colours	<div style="display: flex; align-items: center;"> <div style="width: 20px; height: 15px; background-color: black; margin-right: 5px;"></div> <div>RAL9004 Signal black</div> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: grey; margin-right: 5px;"></div> <div>RAL9007 Grey aluminium</div> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: darkgrey; margin-right: 5px;"></div> <div>RAL7016 Anthracite grey</div> </div> <div style="display: flex; align-items: center; margin-top: 5px;"> <div style="width: 20px; height: 15px; background-color: lightgrey; margin-right: 5px;"></div> <div>RAL9016 Traffic white</div> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP67
Impact resistance	IK07
Corrosion resistance	5CE

## Electrical description

Driver / Ballast	Integral EC electronic converter
------------------	----------------------------------

## Additional information

**Control**

**DALI interface**

---

Description	Part ID
DALI interface	430-0013

---

**1-10 V analogue dimming interface**

---

Description	Part ID
1-10 V analogue dimming interface	430-0011

---

## Mounting Accessories

### Installation cover

Description	Part ID	C1
Installation cover BE	185-0325	250

