



Description

IP67. IK07. Stainless steel inground section. Die-cast hood made from marine-grade aluminium alloy. Construction helps to prevent accumulation of insects, leaves and debris on lens and restricts glare to passers-by. 5CE superior corrosion protection including PCS hardware. Safety glass lens. Silicone rubber gasket. Factory-sealed termination chamber with cable gland and 1.5 m of flexible PVC-free cable.


Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept.

Luminaire installation blockout and sealable junction box included in supply.

Weight	15.90 kg
Light distribution	symmetric, medium beam [M]
Light source	LED-12/24W / 700 mA - 3000 K
CRI	80
Power supply	EC
LEDs	12
Rated input power	27 W

Nominal Lumen (lm)	
LED Lumen	290
Total Lumen	3480
Tj	85

Rated lumens (lm)	
LED Lumen	197.3
Total Lumen	2367.3
Ta	25

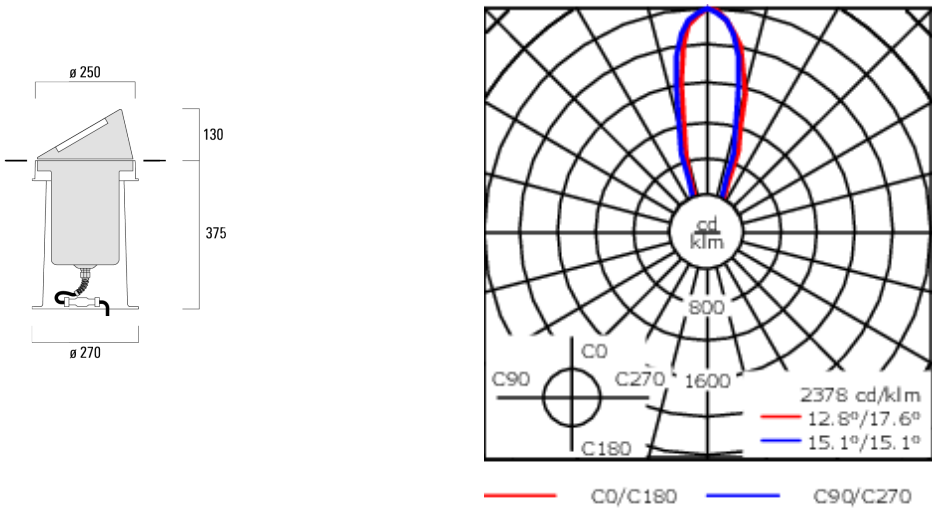

Specifications

Material description

Body	Stainless steel inground section. Die-cast hood made from marine-grade aluminium alloy
Lens	Safety glass lens
Colours	<div><div></div> RAL9004 Signal black</div> <div><div></div> RAL9007 Grey aluminium</div> <div><div></div> RAL7016 Anthracite grey</div> <div><div></div> RAL9016 Traffic white</div>
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP67
Impact resistance	IK07
Corrosion resistance	5CE

Electrical description

Driver / Ballast	Integral EC electronic converter
------------------	----------------------------------

Additional information

185-7502

ESC130-FS LED

we-ef

Control

DALI interface

Description	Part ID
DALI interface	430-0013

1-10 V analogue dimming interface

Description	Part ID
1-10 V analogue dimming interface	430-0011

WE-EF LIGHTING (Thailand) Co., Ltd.

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 16/08/2025

Mounting Accessories

Installation cover

Description	Part ID	C1
Installation cover BE	185-0325	250

