



### Description

IP67, Class I, IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. LED module can be easily removed for upgrading. CAD-optimised optics for superior illumination and glare control.

Luminaire requires installation blackout and sealable junction box, which are included in supply.

2700 K option available on request.

ASC Anti Slip Coating on request.

IMPORTANT! Inground blockouts must be installed with effective drainage, watch [here](https://vimeo.com/672613058).



|                    |  |
|--------------------|--|
| Weight             | 3.50 kg  |
| Light distribution | symmetric, very narrow beam, sharp cut-off [EES] |
| Light source       | LED-6/12W / 700 mA - 4000 K                      |
| CRI                | 80   |
| Power supply       | EC   |
| LEDs               | 6  |
| Rated input power  | 14.5 W   |

### Nominal Lumen (lm)

|             |      |
|-------------|------|
| LED Lumen   | 310  |
| Total Lumen | 1860 |
| Tj          | 85   |

### Rated lumens (lm)

|             |        |
|-------------|--------|
| LED Lumen   | 289.5  |
| Total Lumen | 1736.8 |
| Ta          | 25     |

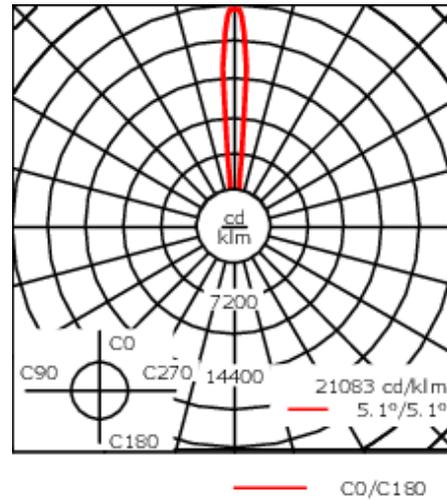

## Specifications

### Material description

|                    |   |
|--------------------|---|
| Body               | Stainless steel construction  |
| Lens               | Safety glass lens, max. load 5 tonnes   |
| Colours            |  Stainless Steel |
| Gasket             | Silicone rubber gasket  |
| Fasteners          | PCS Polymer Coated Stainless Steel Hardware (unpainted)   |
| Ingress protection | IP67  |
| Impact resistance  | IK10+   |

### Electrical description

|                  |                                  |
|------------------|----------------------------------|
| Power supply     | 230V / 50 Hz                     |
| Driver / Ballast | Integral EC electronic converter |
| Termination      | Junction box supplied            |


### Additional information

|          |  |
|----------|--|
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. Warranty void if installed without proper drainage. |
|----------|--|

## Mounting Accessories

### Installation cover

| Description           | Part ID  | C1  |
|-----------------------|----------|-----|
| Installation cover BE | 185-0796 | 160 |




C1

---

## Optical Accessories


### Colour filter

| Description      | Part ID    |
|------------------|------------|
| Colour filter IF | on request |



### Surface wash lens

| Description       | Part ID  | C1 |
|-------------------|----------|----|
| Flood lens IO-360 | 146-0419 | 96 |




**ETC320-FS LED**

---

**Linear spread lens**


| Description              | Part ID  | C1  |
|--------------------------|----------|-----|
| IO-180-ETC/EVC_20-FS-LED | 146-0418 | 110 |



---

**Wallwash lens**

| Description                | Part ID  | C1  |
|----------------------------|----------|-----|
| IO-20-WW-ETC/EVC_20-FS-LED | 185-7029 | 110 |



**Honeycomb louvre**

---

| Description          | Part ID  | C1  |
|----------------------|----------|-----|
| IW-E_C120/320-FS LED | 146-0625 | 110 |

---

