



### Description

IP69. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. 20° tiltable and 355° rotatable. 1-10 V analogue dimming or DALI interface available on request.



Luminaire installation blackout and sealable junction box included in supply.

|                           |  |
|---------------------------|--|
| Weight                    | 4.00 kg  |
| Light distribution        | symmetric, very narrow beam, sharp cut-off [EES] |
| Light source              | LED-3/6W / 700 mA - 4000 K                       |
| CRI                       | 80   |
| Power supply              | EC   |
| LEDs                      | 3  |
| Rated input power         | 7.5 W  |
| <b>Nominal Lumen (lm)</b> |  |
| LED Lumen                 | 310  |
| Total Lumen               | 930  |
| T <sub>j</sub>            | 85   |
| <b>Rated lumens (lm)</b>  |  |
| LED Lumen                 | 249.7  |
| Total Lumen               | 749  |
| T <sub>a</sub>            | 25   |

185-7712


ETC320-GB LED

**we-ef**

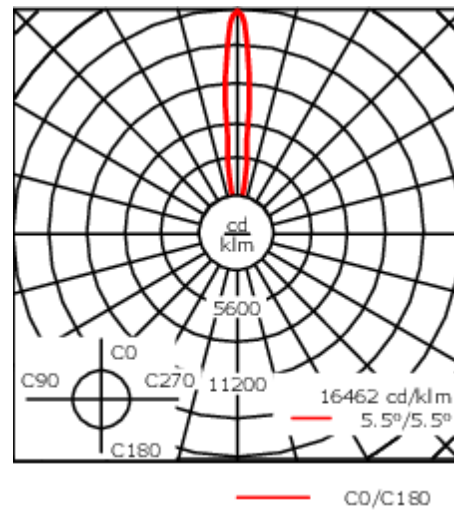

## Specifications

### Material description

|                    |   |
|--------------------|---|
| Body               | Stainless steel construction  |
| Lens               | Safety glass lens, max. load 5 tonnes   |
| Colours            |  Stainless Steel |
| Gasket             | Silicone rubber gasket  |
| Fasteners          | PCS hardware  |
| Ingress protection | IP69  |
| Impact resistance  | IK10+   |

### Electrical description

|                  |                                  |
|------------------|----------------------------------|
| Driver / Ballast | Integral EC electronic converter |
|------------------|----------------------------------|

### Additional information

**WE-EF LIGHTING (Thailand) Co., Ltd.**

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 06/10/2025

**185-7712**

**ETC320-GB LED**

**we-ef**

## **Control**

### **DALI interface**

| Description    | Part ID  |
|----------------|----------|
| DALI interface | 430-0013 |

### **1-10 V analogue dimming interface**

| Description                       | Part ID  |
|-----------------------------------|----------|
| 1-10 V analogue dimming interface | 430-0011 |

**WE-EF LIGHTING (Thailand) Co., Ltd.**

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 06/10/2025

185-7712


ETC320-GB LED

**we-ef**

## Mounting Accessories

### Installation cover

| Description           | Part ID  | C1  |
|-----------------------|----------|-----|
| Installation cover BE | 185-0796 | 160 |



C1

**WE-EF LIGHTING (Thailand) Co., Ltd.**

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 06/10/2025

185-7712


ETC320-GB LED

**we-ef**

## Optical Accessories


### Honeycomb louvre

| Description         | Part ID  | C1 |
|---------------------|----------|----|
| Honeycomb louvre IW | 185-2869 | 60 |



### Linear spread lens

| Description               | Part ID  | C1 |
|---------------------------|----------|----|
| Linear spread lens IO-180 | 185-9612 | 60 |



**WE-EF LIGHTING (Thailand) Co., Ltd.**


57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 06/10/2025

**Flood lens**

| Description       | Part ID  | C1 |
|-------------------|----------|----|
| Flood lens IO-360 | 185-9613 | 60 |



**Linear louvre**

| Description      | Part ID  | Additional information | C1 |
|------------------|----------|------------------------|----|
| Linear louvre IL | 185-9614 | ETC320                 | 60 |



185-7712

ETC320-GB LED


**we-ef**

**Colour filter**

---

| Description      | Part ID    |
|------------------|------------|
| Colour filter IF | on request |

---




---

**Colour correction filter**

---

| Description      | Part ID  |
|------------------|----------|
| IF-3000K > 2400K | 185-9973 |

---



---

**WE-EF LIGHTING (Thailand) Co., Ltd.**

57 Moo 5, Kingkaew Rd., Bangplee, 10540 Samutprakarn - Phone: +66 2 738 96 20 - Fax: +66 2 738 96 29

<https://we-ef.com/asia>

Subject to technical changes and errors. - Generated on 06/10/2025