





Description

IP69. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. 20° tiltable and 355° rotatable. 1-10 V analogue dimming or DALI interface available on request.

Luminaire installation blockout and sealable junction box included in supply.

Weight	12.00 kg
Light distribution	symmetric, very narrow beam, sharp cut-off [EES]
Light source	LED-12/24W / 700 mA - 3000 K
CRI	80
Power supply	EC
LEDs	12
Rated input power	27 W
Nominal Lumen (lm)	
LED Lumen	290
Total Lumen	3480
T _j	85
Rated lumens (lm)	
LED Lumen	252.8
Total Lumen	3033.1
T _a	25

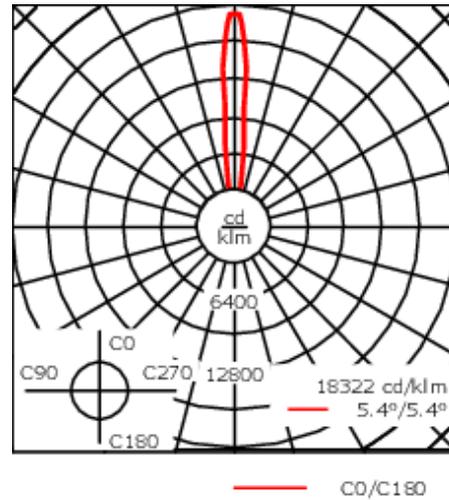

Specifications

Material description

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP69
Impact resistance	IK10+

Electrical description

Driver / Ballast	Integral EC electronic converter
------------------	----------------------------------

Additional information

Control

DALI interface

Description	Part ID
DALI interface	430-0013

1-10 V analogue dimming interface

Description	Part ID
1-10 V analogue dimming interface	430-0011

Mounting Accessories

Installation cover


Description	Part ID	C1
Installation cover BE	185-0326	300



Optical Accessories


Optical Adaptor

Description	Part ID
Internal optical Adaptor IA	185-7419



Linear spread lens


Description	Part ID	C1
Linear spread lens IO-180	185-7581	149



ETC340-GB LED

Flood lens

Description	Part ID	C1
Flood lens IO-360	185-7582	149



Linear louvre


Description	Part ID	C1
Linear louvre IL	185-9568	149



ETC340-GB LED


Colour filter

Description	Part ID
Colour filter IF	on request



Honeycomb louvre

Description	Part ID	C1
Honeycomb Louvre IW	185-2958	96



Colour correction filter

Description	Part ID
IF-3000K > 2400K	185-7480

