



Description

IP67. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. CAD-optimised optics for superior illumination and glare control. OLC® One LED Concept. 20° tiltable and 355° rotatable. 1-10 V analogue dimming or DALI interface available on request.

Luminaire installation blockout and sealable junction box included in supply.

ASC Anti Slip Coating on request.

IMPORTANT! Inground blockouts must be installed with effective drainage, watch [here](https://vimeo.com/672613058).



| | |
|--------------------|--|
| Weight | 12.00 kg |
| Light distribution | symmetric, very narrow beam, sharp cut-off [EES] |
| Light source | LED-12/24W / 700 mA - 4000 K |
| CRI | 80 |
| Power supply | EC |
| LEDs | 12 |
| Rated input power | 27 W |

Nominal Lumen (lm)

| | |
|-------------|------|
| LED Lumen | 310 |
| Total Lumen | 3720 |
| Tj | 85 |

Rated lumens (lm)

| | |
|-------------|--------|
| LED Lumen | 270.2 |
| Total Lumen | 3242.2 |
| Ta | 25 |

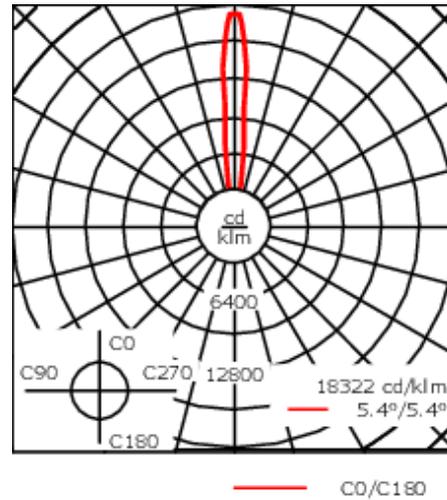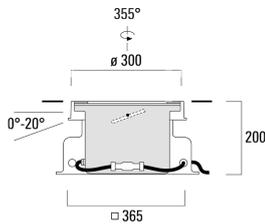

Specifications

Material description

| | |
|--------------------|---|
| Body | Stainless steel construction |
| Lens | Safety glass lens, max. load 5 tonnes |
| Colours |  Stainless Steel |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS Polymer Coated Stainless Steel Hardware (unpainted) |
| Ingress protection | IP67 |
| Impact resistance | IK10+ |

Electrical description

| | |
|------------------|----------------------------------|
| Power supply | 230V / 50 Hz |
| Driver / Ballast | Integral EC electronic converter |
| Termination | Junction box supplied |

Additional information

| | |
|----------|--|
| Warranty | The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details. Warranty void if installed without proper drainage. |
|----------|--|

Mounting Accessories

Installation cover


| Description | Part ID | C1 |
|-----------------------|----------|-----|
| Installation cover BE | 185-0326 | 300 |



Optical Accessories


Optical Adaptor

| Description | Part ID |
|-----------------------------|----------|
| Internal optical Adaptor IA | 185-7419 |



Linear spread lens


| Description | Part ID | C1 |
|---------------------------|----------|-----|
| Linear spread lens IO-180 | 185-7581 | 149 |



ETC340-GB LED

Surface wash lens

| Description | Part ID | C1 |
|-------------------|----------|-----|
| Flood lens IO-360 | 185-7582 | 149 |



Linear louvre

| Description | Part ID | C1 |
|------------------|----------|-----|
| Linear louvre IL | 185-9568 | 149 |



Colour filter

| Description | Part ID |
|------------------|------------|
| Colour filter IF | on request |

