



Description

IP67, Class I, IK07. Stainless steel construction including PCS hardware. Silicone rubber gasket. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 1,5 m of flexible PVC free cable. Cable gland with spiral cable bending protection.

'No tool' removable gear/reflector tray. Anodised aluminium reflector.

Luminaire requires installation blockout and sealable junction box, which are included in supply.

2700 K option available on request.

IMPORTANT! Inground blockouts must be installed with effective drainage, watch **here.**



Weight	18.70 kg
Light distribution	symmetric, very narrow beam, sharp cut-off [EES]
Light source	LED-24/36W / 500 mA - 3000 K
CRI	80
Power supply	EC
LEDs	24
Rated input power	39 W

Nominal Lumen (lm)

LED Lumen	215
Total Lumen	5160
T _j	85

Rated lumens (lm)

LED Lumen	157.9
Total Lumen	3788.6
T _a	25

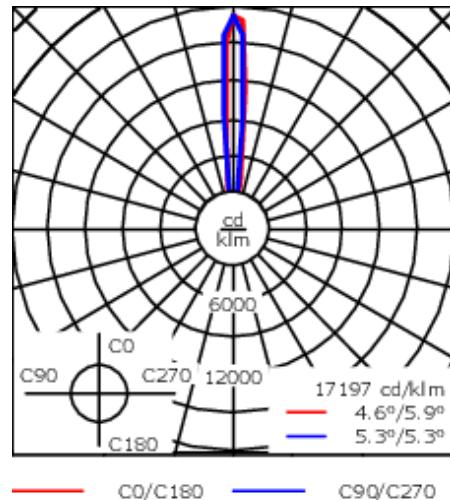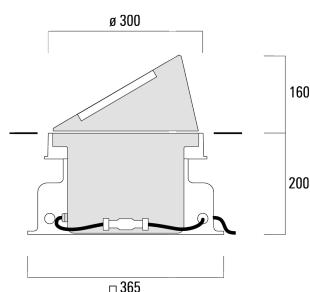

Specifications

Material description

Body	Stainless steel inground section. Die-cast hood made from marine-grade aluminium alloy
Lens	Safety glass lens
Colours	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> RAL9004 Signal black </div> <div style="text-align: center;"> RAL9006 White aluminium </div> <div style="text-align: center;"> RAL9007 Grey aluminium </div> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP67
Impact resistance	IK09
Corrosion resistance	5CE, 5CE+Primer optional

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter
Termination	Junction box supplied

Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.
Warranty void if installed without proper drainage.	

Mounting Accessories

Installation cover

Description	Part ID	C1
Installation cover BE	185-0326	300



C1