



### Description

IP67, Class I, IK07. Stainless steel construction including PCS hardware. Silicone rubber gasket. Safety glass lens; max. load 5 tonnes. Luminaire can be driven over at low speed. Factory-sealed termination chamber complete with cable gland and 1,5 m of flexible PVC free cable. Cable gland with spiral cable bending protection.

'No tool' removable gear/reflector tray. Anodised aluminium reflector.

Luminaire requires installation blockout and sealable junction box, which are included in supply.

2700 K option available on request.

**IMPORTANT!** Inground blockouts must be installed with effective drainage, watch **<strong><a href="https://vimeo.com/672613058">here.</a></strong>**



Weight	18.70 kg
Light distribution	symmetric, medium beam [M]
Light source	LED-24/36W / 500 mA - 4000 K
CRI	80
Power supply	EC
LEDs	24
Rated input power	39 W

### Nominal Lumen (lm)

LED Lumen	230
Total Lumen	5520
T <sub>j</sub>	85

### Rated lumens (lm)

LED Lumen	156.5
Total Lumen	3755
T <sub>a</sub>	25

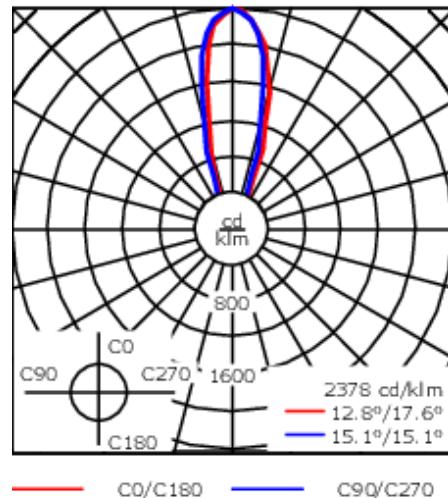

## Specifications

### Material description

Body	Stainless steel inground section. Die-cast hood made from marine-grade aluminium alloy
Lens	Safety glass lens
Colours	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: black; border-radius: 50%;"></span>  RAL9004 Signal black         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #e0e0e0; border-radius: 50%;"></span>  RAL9006 White aluminium         </div> <div style="text-align: center;"> <span style="display: inline-block; width: 20px; height: 20px; background-color: #808080; border-radius: 50%;"></span>  RAL9007 Grey aluminium         </div> </div>
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP67
Impact resistance	IK09
Corrosion resistance	5CE, 5CE+Primer optional

### Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter
Termination	Junction box supplied

### Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details.
Warranty void if installed without proper drainage.	

## Mounting Accessories

### Installation cover

Description	Part ID	C1
Installation cover BE	185-0326	300

