





Description

IP68. 12 V/Class III. IK09. Stainless steel construction including PCS hardware. Silicone rubber gasket. Safety glass lens. Luminaire can be driven over at low speed. Anti-wick technology, equipped with a cable gland and 1.5 meters of flexible, PVC-free cable. IP68 in-line connector facilitates easy removal for off-site lamp replacement.

Factory installed circuit board with High Efficiency LEDs in either white, red, green, blue or RGB. Mains converter required, to be ordered separately.

Luminaire installation blockout and sealable junction box included in supply.

Weight	0.54 kg
Light distribution	symmetric, diffused distribution
Light source	LED-4/0,5W - white
CRI	85
LEDs	4
Rated input power	0.8 W
Nominal Lumen (lm)	
LED Lumen	3.3
Total Lumen	13.4
T _j	25
Rated lumens (lm)	
LED Lumen	0.9
Total Lumen	3.5
T _a	25

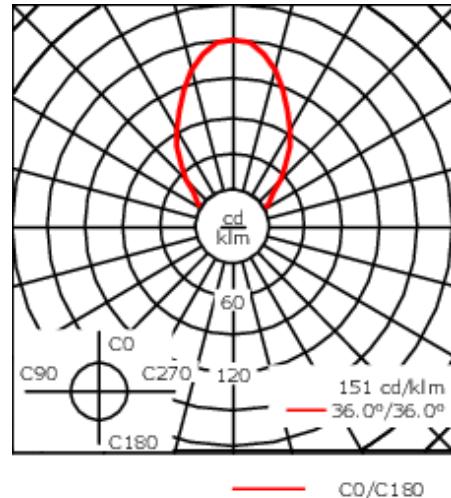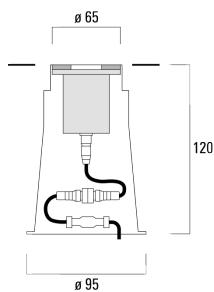

Specifications

Material description

Body	Stainless steel construction
Lens	Safety glass lens with opal diffuser, max. load 5 tonnes
Colours	Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS hardware
Ingress protection	IP68
Impact resistance	IK09

Electrical description

Driver / Ballast	[ON-OFF]
------------------	----------

Additional information

Mounting Accessories

Installation cover

Description	Part ID	C1
Installation cover BE	185-1850	65




C1

Electrical Accessories

Main converter

Description	Part ID	A	B	C1
Transformer DC 12 V/12 W	400-0302	89	59	54

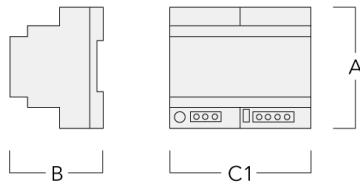

Transformer DC 12 V/48 W 400-0309 89 59 72

