

### Description

IP67, Class I. IK10+. Stainless steel construction including PCS hardware. Safety glass lens, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. LED module can be easily removed for upgrading. CAD-optimised optics for superior illumination and glare control.

Luminaire requires installation blackout and sealable junction box, which are included in supply.

2700 K option available on request.

ASC Anti Slip Coating on request.

**IMPORTANT!** Inground blockouts must be installed with effective drainage, watch [here](https://vimeo.com/672613058).



Weight	11.00 kg
Light distribution	symmetric, medium beam [M]
Light source	LED-24/36W / 500 mA - 4000 K
CRI	80
Power supply	EC
LEDs	24
Rated input power	39 W

### Nominal Lumen (lm)

LED Lumen	230
Total Lumen	5520
Tj	85

### Rated lumens (lm)

LED Lumen	202.5
Total Lumen	4859.4
Ta	25

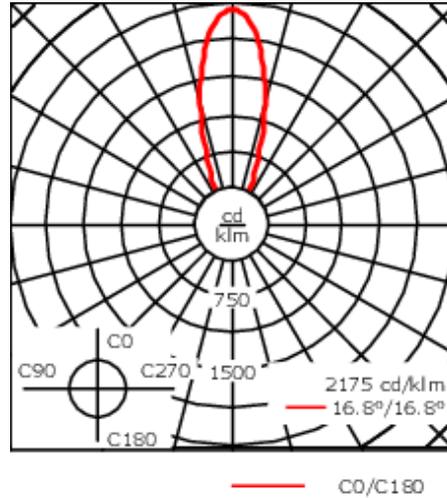

**Specifications**

**Material description**

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP67
Impact resistance	IK10+

**Electrical description**

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter
Termination	Junction box supplied

**Additional information**

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. Warranty void if installed without proper drainage.
----------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

## Mounting Accessories

### Installation cover

---

Description	Part ID	C1
Installation cover BE	185-0326	300

---




**Electrical Accessories**

**Sealable junction box**

---

Description	Part ID	C1	M1	M2
Sealable junction box SJB130	185-1624	146	Ø 10	Ø 12 - 19


---

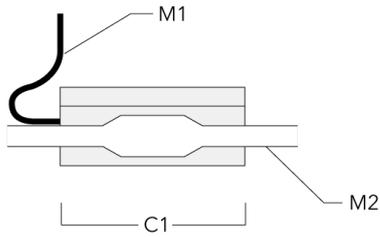

**Optical Accessories**


**Surface wash lens**

Description	Part ID	C1
Flood lens IO-360	185-7579	220



**Linear spread lens**

Description	Part ID	C1
Linear spread lens IO-180	185-7580	220



**Wallwash lens**

Description	Part ID	C1
Wallwash lens IO-20	185-7589	220

