

185-9927

ETC310-FS LED

we-ef



Description

IP67. IK10+. Stainless steel construction including PCS hardware. Safety glass lens with opal diffuser, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Anti-wick technology, equipped with a cable gland and 0.5 meters of flexible, PVC-free cable. Luminaire is factory-sealed and does not need to be opened during installation.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. 1-10 V analogue dimming (where applicable) available on request. Luminaire installation blockout and sealable junction box included in supply.

IMPORTANT! Inground blockouts must be installed with effective drainage, watch [here](https://vimeo.com/672613058).



Weight	2.70 kg
Light distribution	symmetric, very narrow beam [EE]
Light source	LED-3/6W / 700 mA - 3000 K
CRI	80
Power supply	EC
LEDs	3
Rated input power	7.5 W

Nominal Lumen (lm)	
LED Lumen	290
Total Lumen	870
Tj	85

Rated lumens (lm)	
LED Lumen	216.9
Total Lumen	650.7
Ta	25

WE-EF LIGHTING Pty Ltd

47 Tarnard Drive, 3195 Braeside, Victoria - Phone: +61 3 8587 0444 - Fax: +61 3 8587 0499
info.australia@we-ef.com - <https://we-ef.com/aus>
Subject to technical changes and errors. - Generated on 16/08/2025

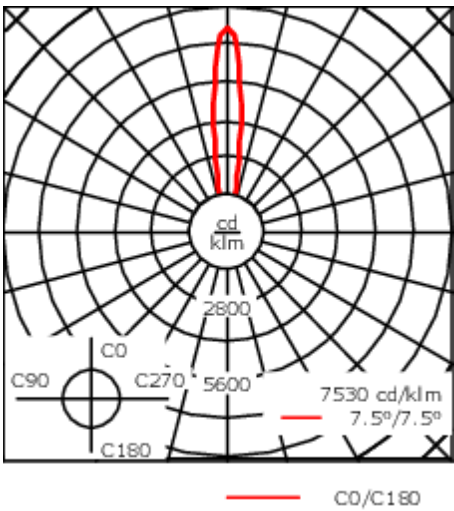

Specifications

Material description

Body	Stainless steel construction
Lens	Safety glass lens, max. load 5 tonnes
Colours	<div></div> Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP67
Impact resistance	IK10+
Corrosion resistance	-

Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter


Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.
	Warranty void if installed without proper drainage.

Optical Accessories


Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	185-9612	60




Surface wash lens

Description	Part ID	C1
Flood lens IO-360	185-9613	60




Wallwash lens

Description	Part ID	C1	Weight (kg)
Wallwash lens IO-20	185-9950	60	0.01




Colour filter

Description	Part ID
Colour filter IF	on request



Honeycomb louvre

Description	Part ID	C1
Honeycomb Louvre IW	185-7181	60



Linear louvre


Description	Part ID	C1
Linear louvre IL	185-7134	60



Mounting Accessories

Installation cover

Description	Part ID	C1
BE31	185-9961	125



Installation blackout

Description	Part ID	D1	D2	H1	Weight (kg)
BET31	185-8411	119	240	126	0.90

