





### Description

IP67. Stainless steel construction including PCS hardware. Safety glass lens with opal diffuser, max. load 5 tonnes. Luminaire can be driven over at low speed. Silicone rubber gasket. Complete with cable gland and 0.5 m of flexible PVC-free cable. Luminaire is factory-sealed and does not need to be opened during installation. Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output. Removable LED boards for upgrading. 1-10 V analogue dimming (where applicable) available on request. Luminaire installation blockout and sealable junction box included in supply.

2700 K option available on request.

IMPORTANT! Inground blockouts must be installed with effective drainage, watch [here](https://vimeo.com/672613058).

Weight	2.80 kg
Light distribution	symmetric, diffused distribution
Light source	LED-3/3W / 350 mA - 3000 K
CRI	80
Power supply	EC
LEDs	3
Rated input power	5.7 W
<b>Nominal Lumen (lm)</b>	
LED Lumen	155
Total Lumen	465
T <sub>j</sub>	85
<b>Rated lumens (lm)</b>	
LED Lumen	45.9
Total Lumen	137.8
T <sub>a</sub>	25

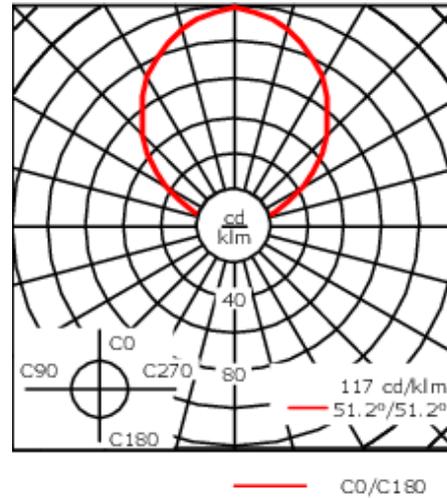

## Specifications

### Material description

Body	Stainless steel construction
Lens	Safety glass lens with opal diffuser, max. load 5 tonnes
Colours	 Stainless Steel
Gasket	Silicone rubber gasket
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)
Ingress protection	IP67
Impact resistance	IK10+
Corrosion resistance	-

### Electrical description

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter


### Additional information

Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on <a href="http://www.we-ef.com">www.we-ef.com</a> for further details. Warranty void if installed without proper drainage.
----------	--

## Mounting Accessories

### Installation cover

Description	Part ID	C1
BE31	185-9961	125



### Installation blackout

Description	Part ID	D1	D2	H1	Weight (kg)
BET31	185-8411	119	240	126	0.90

