





Description

IP67, Class I. IK09. Marine-grade, all aluminium construction. 5CE superior corrosion protection + primer including PCS hardware. PMMA cover. Silicone rubber gasket. Linear PMMA LED lens. 1.2 m connecting cable, UV stabilized, PVC free. Luminaire is factory sealed and does not need to be opened during installation and can be tilted up to 180°. Integral LED driver with DALI interface.

Separate LED driver on request.

Weight	3.25 kg
Light distribution	symmetric linear, narrow beam [LE]
Light source	LED-48/30W / 225 mA - 3000 K
CRI	80
Power supply	EC
LEDs	48
Rated input power	33.5 W
Nominal Lumen (lm)	
LED Lumen	90
Total Lumen	4320
T _j	85
Rated lumens (lm)	
LED Lumen	65.7
Total Lumen	3151.9
T _a	25

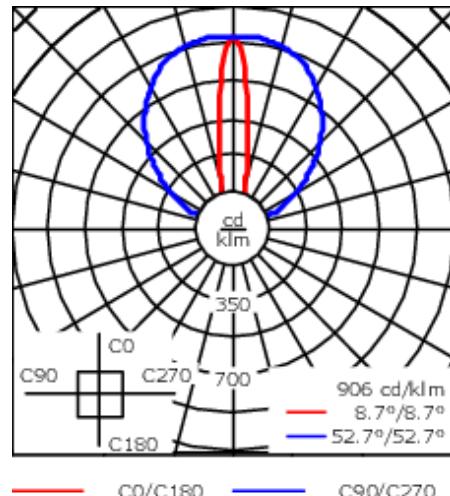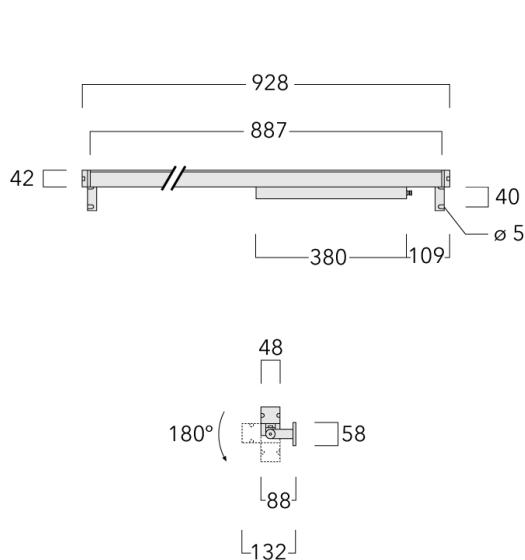

Specifications

Material description

Body Marine-grade, all-aluminium construction

Lens PMMA

Colours RAL 9004 Signal black

RAL 9006 White aluminium

RAI 8007 Grey aluminum

Gasket

Fasteners

Electrical description

Power supply 230V / 50 Hz

Driver / Ballast Integral LED driver with DALI Interface

Additional information

Lifetime $T_a=40^\circ$ | 90B10 > 90000h

Warranty The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.