



Description

ADA (American Disabilities Act) Compliant.

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Integral driver. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.


Suitable for installation on ceiling or wall over 4" recessed junction box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.  
Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

|                    |                              |
|--------------------|------------------------------|
| Weight             | 5.00 lb                      |
| Light distribution | diffused distribution        |
| Light source       | LED-FT-17W / 500 mA - 3000 K |
| CRI                | 80                           |
| Power supply       | electronic gear              |
| LEDs               | 1                            |
| Rated input power  | 20 W                         |

|                       |        |
|-----------------------|--------|
| Delivered lumens (lm) |        |
| LED Lumen             | 1206.5 |
| Total Lumen           | 1206.5 |
| Ta                    | 25     |

|                    |      |
|--------------------|------|
| Nominal Lumen (lm) |      |
| LED Lumen          | 3070 |
| Total Lumen        | 3070 |
| Tc                 | 25   |

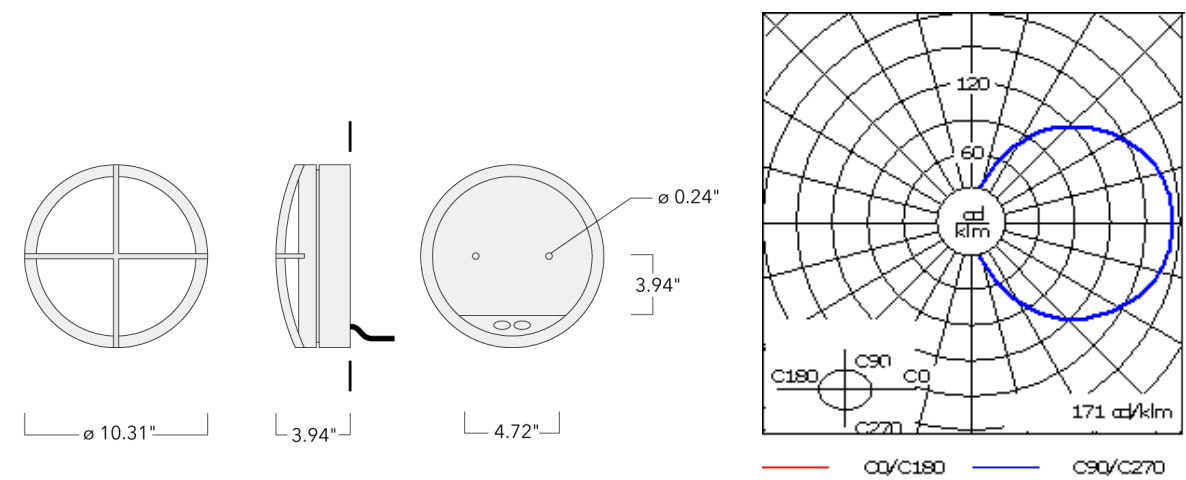

Specifications  
Material description

|                      |   |
|----------------------|---|
| Body                 | Luminaire body and lens frame constructed in die cast aluminum.   |
| Lens                 | Opal polycarbonate lens.  |
| Colors               | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket               | Silicone rubber gasket  |
| Fasteners            | PCS polymer coated stainless steel  |
| Ingress protection   | IP55  |
| Impact resistance    | IK10  |
| Corrosion resistance | 5CE   |

Electrical description

|                  |  |
|------------------|--|
| Power supply     | Integral [ECG] LED driver in 120 or 277 volt. Specify voltage. |
| Driver / Ballast | Integral EC electronic converter                               |

Additional information

|          |  |
|----------|--|
| Lifetime | Ta=25°/40° L70B50 > 50000h                                 |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |