XLO229 LED





Description


IP55, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Polycarbonate lens. Silicone rubber gasket. Two cable entries.


Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output.

Weight	3.20 kg
Light distribution	diffused distribution
Light source	LED-FT-17W / 500 mA - 3000 K
CRI	80
Power supply	EC
LEDs	1
Rated input power	20 W
Rated lumens (lm)	
LED Lumen	1408.7
Total Lumen	1408.7
Та	25
Nominal Lumen (lm)	
LED Lumen	3070
Total Lumen	3070
Тс	25

XLO229 LED



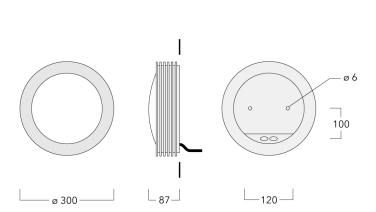



Specifications Material description

Body Marine-grade die-cast aluminium alloy

Lens Polycarbonate lens

Colours RAL9004 Signal black

RAL9006 White aluminium
RAL9007 Grey aluminium

Gasket Silicone rubber gasket

Fasteners PCS Polymer Coated Stainless Steel Hardware (unpainted)

Ingress protection IP55
Impact resistance IK10

Corrosion resistance 5CE+Primer

Electrical description

Power supply 230V / 50 Hz

Driver / Ballast Integral EC electronic converter

Additional information

Lifetime	Ta=40° L70B50 > 50000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.

WE-EF LIGHTING Pty Ltd



195-9533 XLO229 LED

WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria Phone: +61 3 8587 0444 Fax: +61 3 8587 0499 info.australia@we-ef.com https://we-ef.com/aus

Subject to technical changes and errors. Generated on 23/10/2024

