


#### Description

IP55, Class I. IK10. Marine-grade, die-cast aluminium alloy. 5CE superior corrosion protection + primer including PCS hardware. Polycarbonate lens. Silicone rubber gasket. Two cable entries.

Integral EC electronic converter. Advanced thermal management protects LEDs while optimising lumens output.

Weight	3.20 kg	
Light distribution	diffused distribution	
Light source	LED-FT-17W / 500 mA - 4000 K	
CRI	80	
Power supply	EC	
LEDs	1	
Rated input power	20 W	
Rated lumens (lm)		
LED Lumen	1468.4	
Total Lumen	1468.4	
Та	25	
Nominal Lumen (lm)		
LED Lumen	3200	
Total Lumen	3200	
Тс	25	

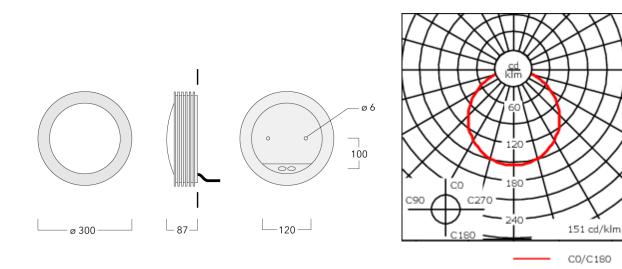

# Specifications Material description

Body	Marine-grade die-cast aluminium alloy	
Lens	Polycarbonate lens	
Colours	RAL9004 Signal black	
	RAL9006 White aluminium	
	RAL9007 Grey aluminium	
Gasket	Silicone rubber gasket	
Fasteners	PCS Polymer Coated Stainless Steel Hardware (unpainted)	
Ingress protection	IP55	
Impact resistance	IK10	
Corrosion resistance	5CE+Primer	

## **Electrical description**

Power supply	230V / 50 Hz
Driver / Ballast	Integral EC electronic converter

## **Additional information**

Lifetime	Ta=40° L70B50 > 50000h
Warranty	The product is supplied with 10-year warranty. Please refer to the LED Warranty Statement located on www.we-ef.com for further details.



### 195-9534

### XLO229 LED

#### WE-EF LIGHTING Pty Ltd

6/13 Downard Street, 3195 Braeside, Victoria Phone: +61 3 8587 0444 Fax: +61 3 8587 0499 info.australia@we-ef.com https://we-ef.com/aus

Subject to technical changes and errors. Generated on 23/10/2024

