

## **Description**

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Integral driver. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Suitable for installation on ceiling or wall over 4" recessed junction box.


Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)

+ XXX-XXXX (Accessory 1)

Weight	8.00 lb
Light distribution	diffused distribution
Light source	LED-FT-28W / 800 mA - 3000 K
CRI	80
Power supply	electronic gear
LEDs	1
Rated input power	31 W
Delivered lumens (lm)	
LED Lumen	1518.3
Total Lumen	1518.3
Та	25
Nominal Lumen (lm)	
LED Lumen	4760
Total Lumen	4760
Тс	25
·	

## **DLG239 LED**

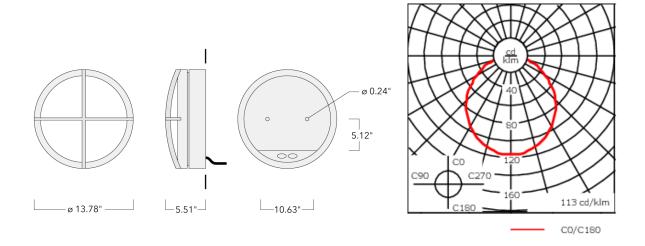

# **Specifications Material description**

Body		11 (		in die cast aluminum.
RODV	Luminaira hadv	and lane tr	ama constructed	in dia cast alliminiim
DOGV	Luminane body		arrie constructed	iii die cast aluiiiiiluiii.

Lens Opal polycarbonate lens.

Colors RAL9004 Black

RAL9007 Grey Metallic

RAL9016 White

RAL8019 Dark Bronze

Gasket Silicone rubber gasket

Fasteners PCS polymer coated stainless steel

Ingress protection IP55
Impact resistance IK10
Corrosion resistance 5CE

## **Electrical description**

Power supply	Integral [ECG] LED driver in 120 or 277 volt. Specify voltage.

Driver / Ballast Integral EC electronic converter

## **Additional information**

Lifetime	Ta=25°/40° L70B50 > 50000h
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.