



Description

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Integral driver. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Suitable for installation on ceiling or wall over 4" recessed junction box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.


Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

| | |
|--------------------|------------------------------|
| Weight | 8.00 lb |
| Light distribution | diffused distribution |
| Light source | LED-FT-28W / 800 mA - 4000 K |
| CRI | 80 |
| Power supply | electronic gear |
| LEDs | 1 |
| Rated input power | 31 W |

| Delivered lumens (lm) | |
|-----------------------|--------|
| LED Lumen | 1585.3 |
| Total Lumen | 1585.3 |
| Ta | 25 |

| Nominal Lumen (lm) | |
|--------------------|------|
| LED Lumen | 4970 |
| Total Lumen | 4970 |
| Tc | 25 |

195-9540
DLG239 LED

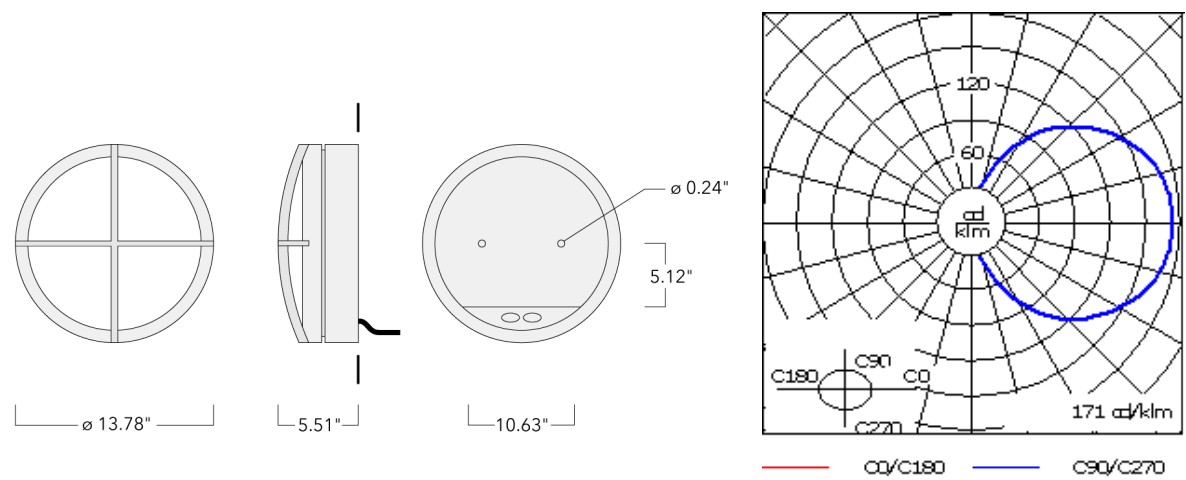

Specifications
Material description

| | |
|----------------------|---|
| Body | Luminaire body and lens frame constructed in die cast aluminum. |
| Lens | Opal polycarbonate lens. |
| Colors | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS polymer coated stainless steel |
| Ingress protection | IP55 |
| Impact resistance | IK10 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|--|
| Power supply | Integral [ECG] LED driver in 120 or 277 volt. Specify voltage. |
| Driver / Ballast | Integral EC electronic converter |

Additional information

| | |
|----------|--|
| Lifetime | Ta=25°/40° L70B50 > 50000h |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |