

195-9543

DLS239 LED

we-ef



Description

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Integral driver. Factory-installed LED circuit board. 0-10V Dimming comes standard with luminaire.

Suitable for installation on ceiling or wall over 4" recessed junction box.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)
+ XXX-XXXX (Accessory 1)

| | |
|--------------------|------------------------------|
| Weight | 8.00 lb |
| Light distribution | diffused distribution |
| Light source | LED-FT-28W / 800 mA - 4000 K |
| CRI | 80 |
| Power supply | electronic gear |
| LEDs | 1 |
| Rated input power | 31 W |


| | |
|------------------------------|--------|
| Delivered lumens (lm) | |
| LED Lumen | 1250.9 |
| Total Lumen | 1250.9 |
| Ta | 25 |

| | |
|---------------------------|------|
| Nominal Lumen (lm) | |
| LED Lumen | 4970 |
| Total Lumen | 4970 |
| Tc | 25 |

195-9543

DLS239 LED

we-ef

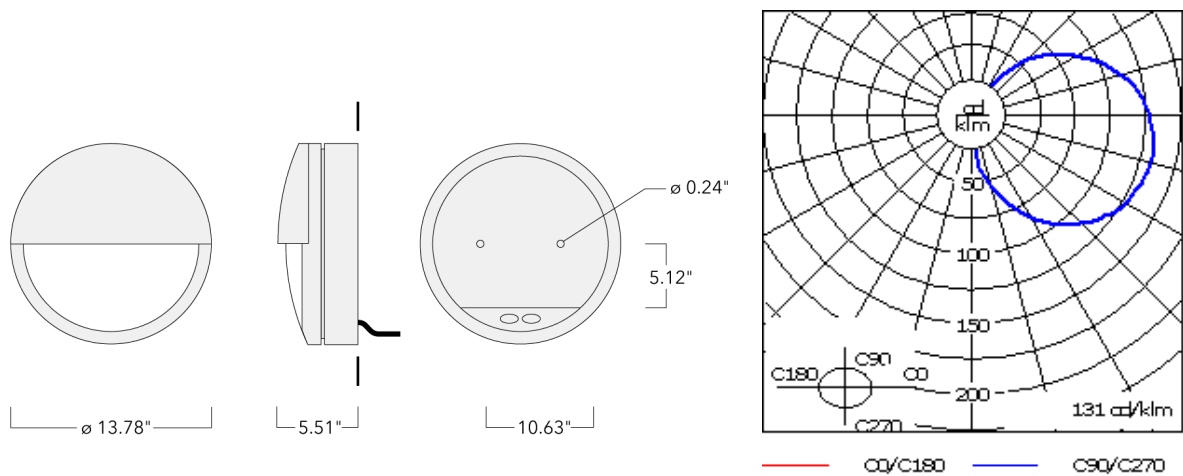

Specifications

Material description

| | |
|----------------------|---|
| Body | Luminaire body and lens frame constructed in die cast aluminum. |
| Lens | Opal polycarbonate lens. |
| Colors | <div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div> |
| Gasket | Silicone rubber gasket |
| Fasteners | PCS polymer coated stainless steel |
| Ingress protection | IP55 |
| Impact resistance | IK10 |
| Corrosion resistance | 5CE |

Electrical description

| | |
|------------------|---|
| Power supply | Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order. |
| Driver / Ballast | Integral EC electronic converter |

Additional information

| | |
|----------|--|
| Lifetime | Ta=25°/40° L70B50 > 50000h |
| Listings | ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations. |