

Description

Anti-Slip ceramic Coating.

IP69K. Class I. IK10+. Stainless steel construction. PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens; max load 5.5 tons (11,000 lbs). Luminaire can be driven over at low speed. Cable gland with spiral cable bending protection. Factory-sealed termination chamber complete with cable gland and 3 ft of flexible PVC-free, gel-impregnated anti-wicking cable. PMMA LED Lens array. Factory-installed circuit board with High Efficiency LEDs. Gimbal mounted, 360° rotatable and 30° tiltable. 'No tool' removable gear/lens tray.



The concrete-pour installation blackout is supplied as standard with luminaire.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.  
Example: XXX-XXXX-9004 (Black).  
+ XXX-XXXX (Accessory 1)

Weight	29.90 lb
Light distribution	symmetric, wide beam [W]
Light source	LED-24/24W / 350 mA - 4000 K
CRI	80
Power supply	electronic gear
LEDs	24
Rated input power	26.5 W

Nominal Lumen (lm)	
LED Lumen	170
Total Lumen	4080
Tj	85

Delivered lumens (lm)	
LED Lumen	115.4
Total Lumen	2770.6
Ta	25

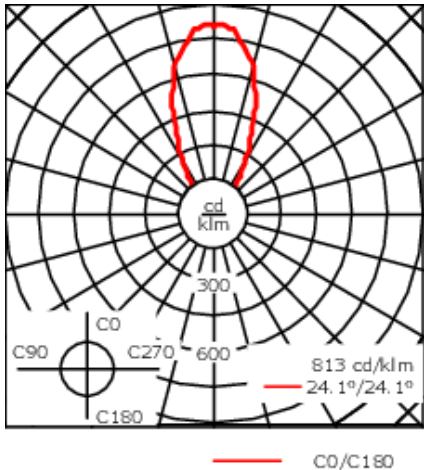

Specifications

Material description

Body	Luminaire body constructed of deep drawn stainless steel. Outer housing composite material.
Lens	5/8 in thick Antislip Coating ASC tempered glass lens (Slip Resistance Class R10), max load 5 tonnes
Colors	<div><div></div>Stainless Steel</div>
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP69K - HIGHEST PROTECTION RATING AVAILABLE
Impact resistance	IK10+
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Termination	Factory sealed termination chamber


Additional information

LIFETIME	Ta=25°/40° L90B10 > 90000h
Dimming	0-10V available in request. Must be factory fitted.
Listings	ETL, UL-1598, CSA-C22.2#250.0. Suitable for Wet Locations.


Optical Accessories

Honeycomb louvre

Description	Part ID	C1
IW-ETC120_GB_LED Honeycomb louvre	185-2869	2.89



IW-ETC140_GB_LED	185-2871	5.87
------------------	----------	------



Linear spread lens

Description	Part ID	C1
Linear spread lens IO-180	185-9612	2.36

