

197-6300

QRI374 LED

we-ef



Description

Recessed LED wall luminaire.

ADA (American Disabilities Act) Compliant.

IP55. Class I. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Safety glass lens. Two cable entries. 0-10V Dimming comes standard with luminaire.

A pre-installation blackout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code – Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

Weight	16.00 lb
Light distribution	asymmetric, forward-throw [A60]
Light source	14 LED 14W (3000K)
CRI	80
Power supply	electronic gear
LEDs	1
Rated input power	18 W

Delivered lumens (lm)

LED Lumen	548
Total Lumen	548
Ta	25

Nominal Lumen (lm)

LED Lumen	1400
Total Lumen	1400
Tc	25


WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>  
Subject to technical changes and errors. - Generated on 08/14/2025

197-6300

QRI374 LED

we-ef

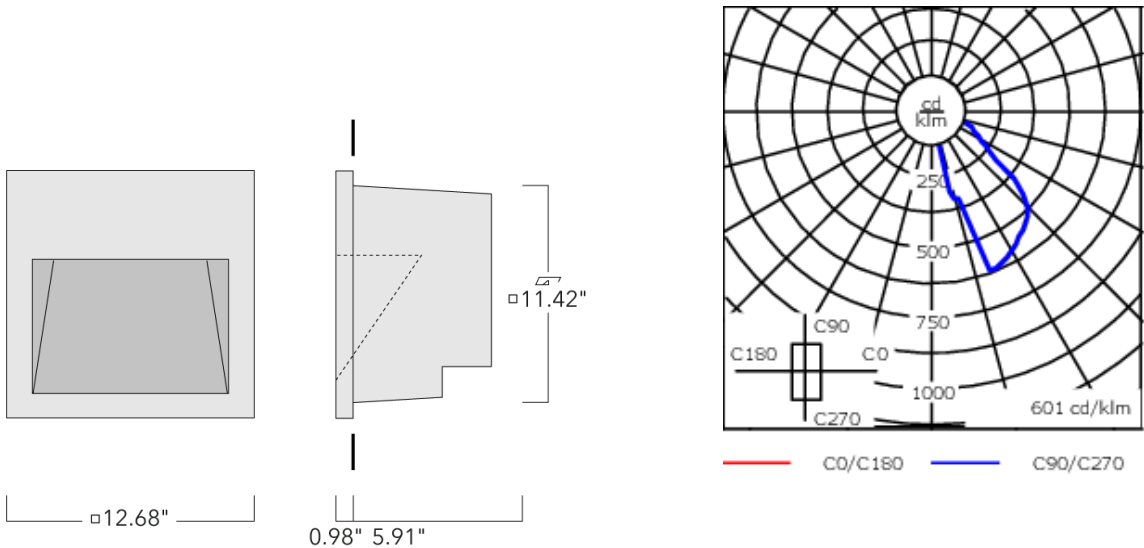

Specifications

Material description

Body	Luminaire body and lens frame constructed in die cast aluminum.
Lens	Tempered glass lens.
Colors	<div><div></div> RAL9004 Black</div> <div><div></div> RAL9007 Grey Metallic</div> <div><div></div> RAL9016 White</div> <div><div></div> RAL8019 Dark Bronze</div>
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE

Electrical description

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
--------------	---

Additional information

Ambient Temperature	Ta less than 25 deg C
Listings	ETL listed. Suitable for wet locations.